


AWOS-3P  
121.55  
ANCHORAGE CENTER  
133.3 290.4  
CTAF  
123.0

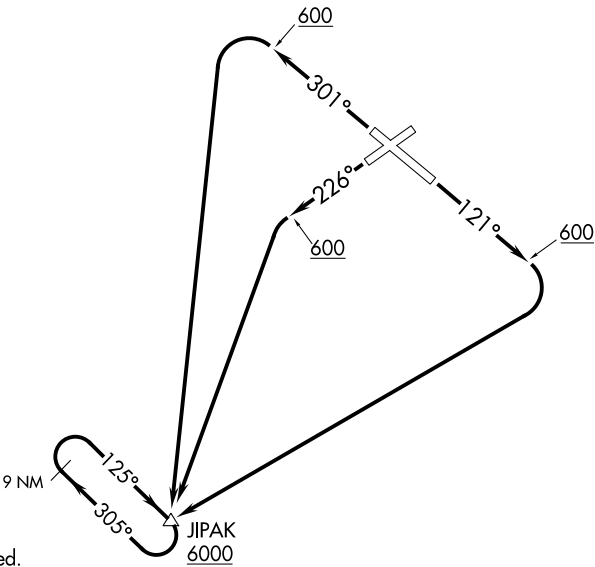

NOTE: GPS required.  
NOTE: RNAV 1.

TAKEOFF MINIMUMS

Rwy 5: NA-Terrain.  
Rwys 12, 23: Standard.  
Rwy 30: 400-2¾ or standard with minimum climb of 280' per NM to 600.

TAKEOFF OBSTACLE NOTES

Rwy 12: Bush 153' from DER, 373' right of centerline, 15' AGL/40' MSL.  
Rwy 23: Terrain 103' from DER, 300' right of centerline, 69' MSL.  
Pole 263' from DER, 542' right of centerline, 35' AGL/60' MSL.  
Vehicles on road 135' from DER, 440' left of centerline, 14' AGL/39' MSL.  
Rwy 30: Terrain beginning 142' from DER, left and right of centerline, up to 85' MSL.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 12: Climb heading 121° to 600 then right turn direct JIPAK, thence. . .  
TAKEOFF RUNWAY 23: Climb heading 226° to 600 then left turn direct JIPAK, thence. . .  
TAKEOFF RUNWAY 30: Climb heading 301° to 600 then left turn direct JIPAK, thence. . .  
...continue climb in hold at JIPAK to at or above 6000 before proceeding on course.