


WAAS CH 61304 W03A	APP CRS 036°	Rwy Idg 10001 TDZE 633 Apt Elev 645
----------------------------------------	------------------------	----------------------------------------------------------------

RNAV (GPS) Z RWY 3R

DETROIT METROPOLITAN WAYNE COUNTY (DTW)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations.		ALSF-2 ⓘ	MISSED APPROACH: Climb to 1100 then climbing right turn to 4000 direct GAAGE and hold, continue climb-in-hold to 4000.	
D-ATIS 133.675	DETROIT APP CON 125.15 284.0	METRO TOWER 118.4 317.725	GND CON 121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)	CLNC DEL 120.65
				CPDLC

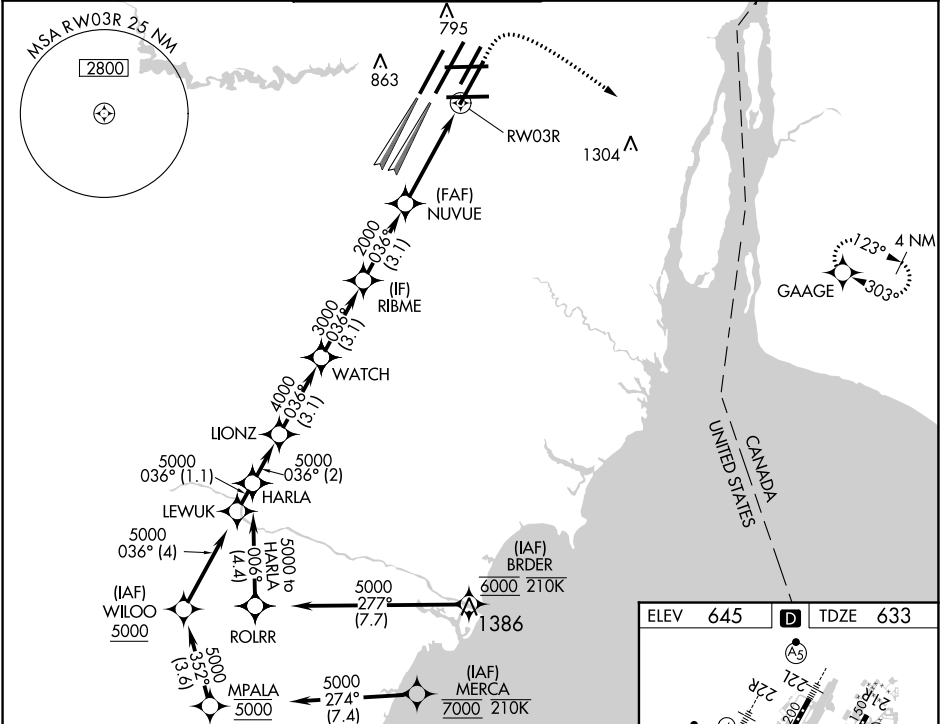

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).				
HARLA LIONZ WATCH RIBME NUVUE		1100 4000 GAAGE		
5000-036° 5000 4000 3000 2000		* LNAV only.		
GP 3.00° TCH 54		* 1.2 NM to RW03R		
2 NM 3.1 NM 3.1 NM 3.1 NM 2.9 NM 1.2				
CATEGORY	A	B	C	D
LPV DA	833/18		200 (200-½)	
LNAV/VNAV DA	1013/35		380 (400-¾)	
LNAV MDA	1080/24	447 (500-½)	1080/45	447 (500-¾)
CIRCLING	1180-1	535 (600-1)	1180-1½	1240-2
			535 (600-1½)	595 (600-2)

