TOP ALTITUDE: ASSIGNED BY ATC

ATIS 125.325 270.1
CLNC DEL 128.3 275.8
GND CON 128.3 275.8
SELFRIDGE TOWER ★ 120.15 225.4
SELFRIDGE DEP CON 119.6 391.9

007°
187°

TAKEOFF MINIMUMS:
Rwy 1: Standard.
Rwy 19: Standard with minimum climb of 234' per NM to 1500.

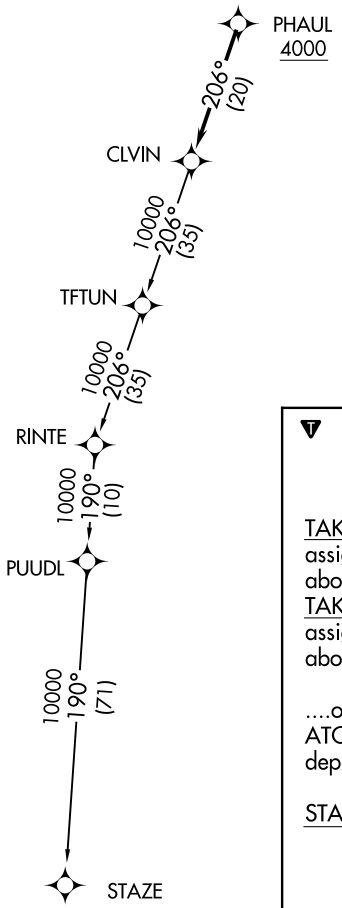

NOTE: RNAV 1.
NOTE: RADAR required.
NOTE: DME/DME/IRU or GPS required.
NOTE: Turbojet departures at/above 10000, maintain 280K until advised by ATC.

NOTE: Chart not to scale.

DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAY 1: Climb on heading 007° or as assigned for RADAR vectors to cross PHAUL at or above 4000, thence....
TAKEOFF RUNWAY 19: Climb on heading 187° or as assigned for RADAR vectors to cross PHAUL at or above 4000, thence....

....on track 206° to CLVIN, then on (transition). Maintain ATC assigned altitude, expect filed altitude 10 minutes after departure.

STAZE TRANSITION (CLVIN2.STAZE):

EC-1, 03 DEC 2020 to 31 DEC 2020
EC-1, 03 DEC 2020 to 31 DEC 2020