

WAAS CH 97718 W05A	APP CRS 053°	Rwy Idg 7543 TDZE 716 Apt Elev 716
--	------------------------	---


RNAV (GPS) RWY 5R
WILLOW RUN (YIP)

- T** Circling to Rwy 9 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM.






MISSED APPROACH: Climb to 1200 then climbing left turn to 3000 direct SVM VORTAC and hold.

ATIS 127.425	DETROIT APP CON 118.95 284.0	WILLOW RUN TOWER 125.275 256.9	GND CON 119.975
-----------------	---------------------------------	-----------------------------------	--------------------

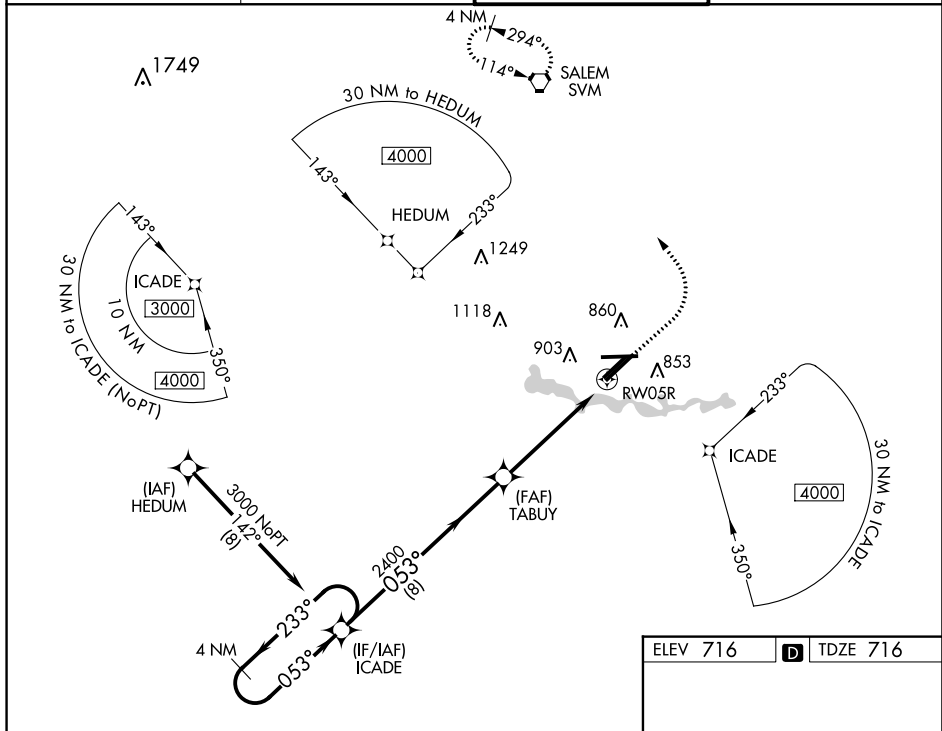

ELEV 716	D	TDZE 716
----------	----------	----------

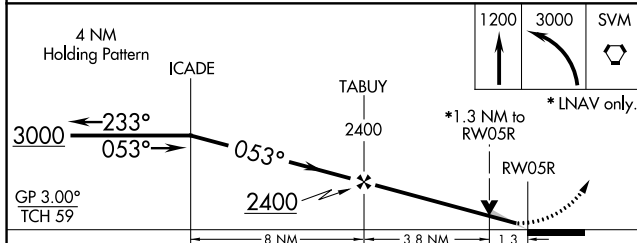

CATEGORY	A	B	C	D
LPV DA	916/18		200 (200-½)	
LNAV/VNAV DA	1055/30		339 (400-⅝)	
LNAV MDA	1200/24	484 (500-½)	1200/50	484 (500-1)
 CIRCLING	1220-1	504 (600-1)	1220-1½ 504 (600-1½)	1400-2¼ 684 (700-2¼)

TDZ/CL Rwy 5R
HIRL Rwy 5R-23L
MIRL Rwys 5L-23R, and 9-27