
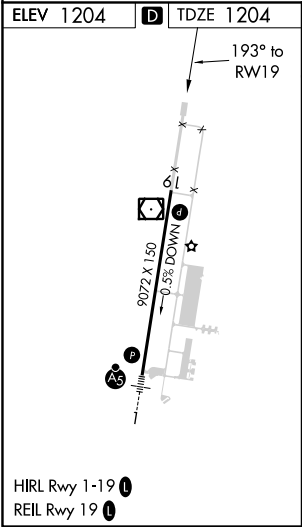


WAAS CH 86616 W19A	APP CRS 193°	Rwy Idg TDZE Apt Elev	9072 1204 1204
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 19
SAWYER INTL (SAW)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C.		MISSED APPROACH: Climb to 3500 direct EVYIP and hold.		
AWOS-3 118.375	MINNEAPOLIS CENTER 119.1 290.2	SAWYER TOWER ★ 119.975 (CTAF) 0	GND CON 121.65	UNICOM 122.7

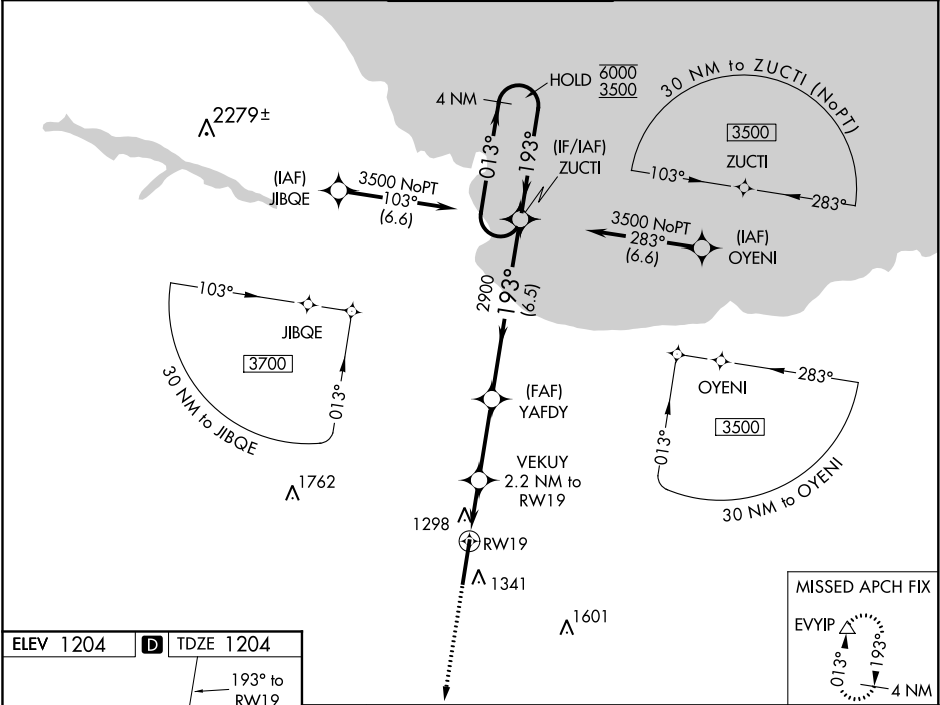

ELEV 1204		D	TDZE 1204
3500		EVYIP	4 NM Holding Pattern
* LNAV only		VEKUY 2.2 NM to 2900 RW19	YAFDY
* 1.6 NM to RW19		* 1960	2900
1.6 NM		0.6 NM	2.9 NM
CATEGORY		A	B
LPV DA		1404-3/4	200 (200-3/4)
LNAV/VNAV DA		1521-7/8	317 (400-7/8)
LNAV MDA		1620-1	416 (500-1)
CIRCLING		1680-1	476 (500-1)