



WAAS CH 77601 W06A	APP CRS 059°	Rwy Idg TDZE 831 Apt Elev 839
----------------------------------------	------------------------	---------------------------------------------------

RNAV (GPS) RWY 6

ANN ARBOR MUNI (ARB)

RNP APCH.	<div><div>▼</div><div>▲</div></div> For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 38°C. VDP and Baro-VNAV NA when using Willow Run altimeter setting. When local altimeter setting not received, use Willow Run altimeter setting and increase all DA/MDA 40 feet; increase LNAV Cats C and D visibility ½ SM.	MISSED APPROACH: Climb to 3000 direct VAQOL and hold.
-----------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------

ATIS 134.55	DETROIT APP CON 118.95 284.0	ANN ARBOR TOWER ★ 120.3 (CTAF) 0	GND CON 121.6	CLNC DEL 121.6	UNICOM 123.0
-----------------------	----------------------------------------	--------------------------------------------	-------------------------	--------------------------	------------------------

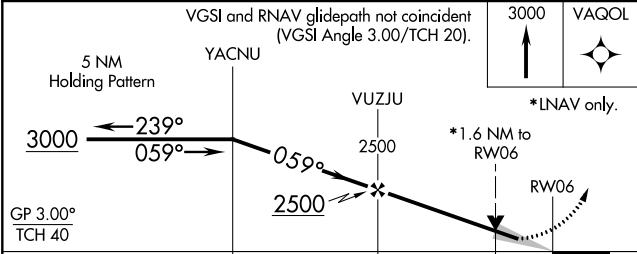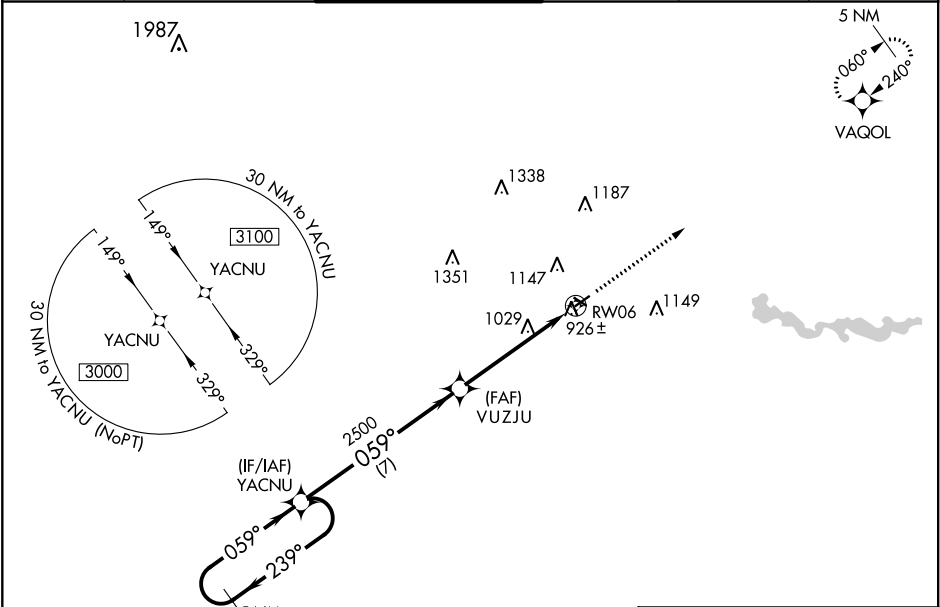

CATEGORY	A	B	C	D
LPV DA	1081-1 250 (300-1)			
LNAV/VNAV DA	1097-1 266 (300-1)			
LNAV MDA	1360-1 529 (600-1)		1360-1½ 529 (600-1½)	

