APP CRS	Rwy Idg	4304
116°	TDZE	869
	Apt Elev	869

RNAV (GPS) RWY 11

LUCE COUNTY (ERY)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Chippewa Co Intl altimeter setting and increase DA 105 feet and all MDA 120 feet, increase LNAV/VNAV visibility ¼ mile all Cats, LNAV Cats C and D ½ mile, and Circling Cats C and D ¼ mile. Baro-VNAV NA when using Chippewa Co Intl altimeter setting.

MISSED APPROACH: Climb to 2700 direct DIHZE and hold.

AWOS-3	MINNEAPOLIS CENTER	UNICOM
119.525	134.6 354.05	122.8 (CTAF) L

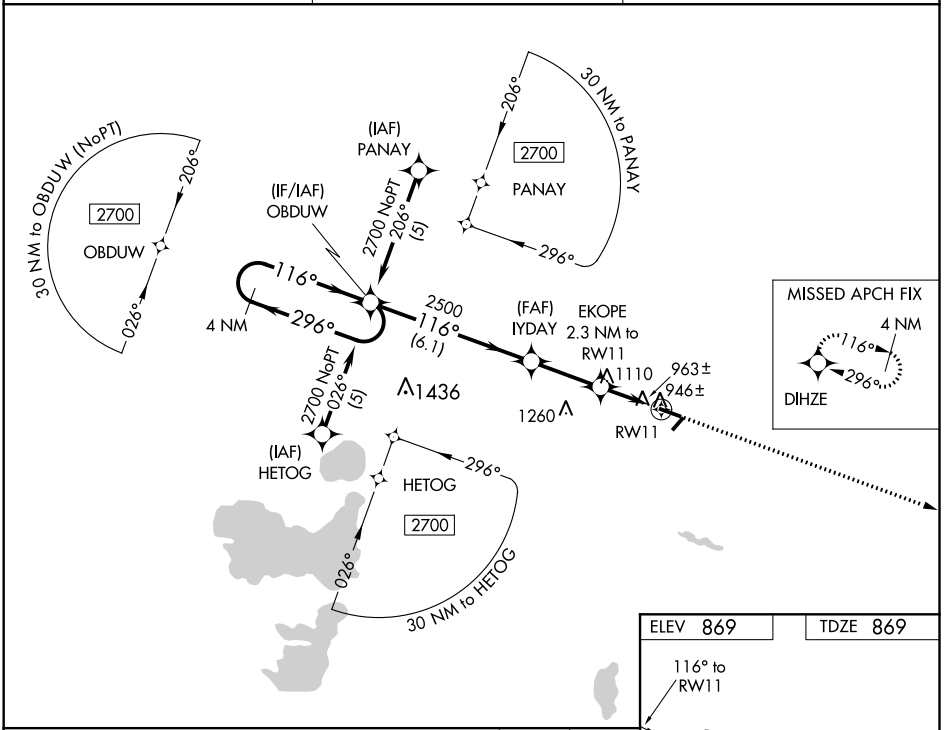

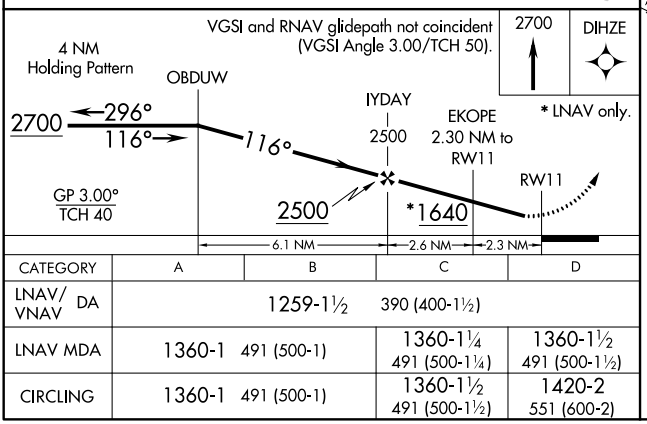

CATEGORY	A	B	C	D
LNAV/VNAV DA	1259-1½		390 (400-1½)	
LNAV MDA	1360-1 491 (500-1)		1360-1¼ 491 (500-1¼)	1360-1½ 491 (500-1½)
CIRCLING	1360-1 491 (500-1)		1360-1½ 491 (500-1½)	1420-2 551 (600-2)

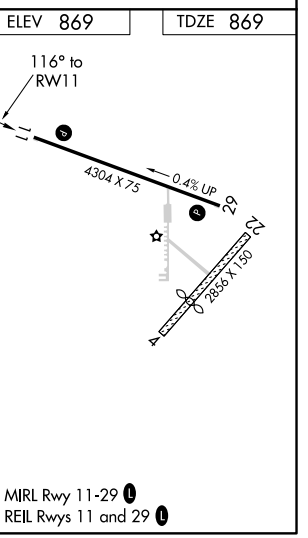

MIRL Rwy 11-29 L
REIL Rwys 11 and 29 L

EC-1, 03 DEC 2020 to 31 DEC 2020
EC-1, 03 DEC 2020 to 31 DEC 2020