WAAS	APP CRS	Rwy Idg	10900
CH 66013	241°	TDZE	997
W24B		Apt Elev	1009

RNAV (GPS) Z RWY 24R

JAMES M COX DAYTON INTL (DAY)

RNP APCH.

V For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.

MALSR (A5)

MISSED APPROACH: Climb to 3000 direct ZUXOT and on track 238° to ALIAS and hold.

ATIS	COLUMBUS APP CON	DAYTON TOWER	GND CON	CLNC DEL
125.8	118.425 323.15	119.9 257.7	121.9	121.75

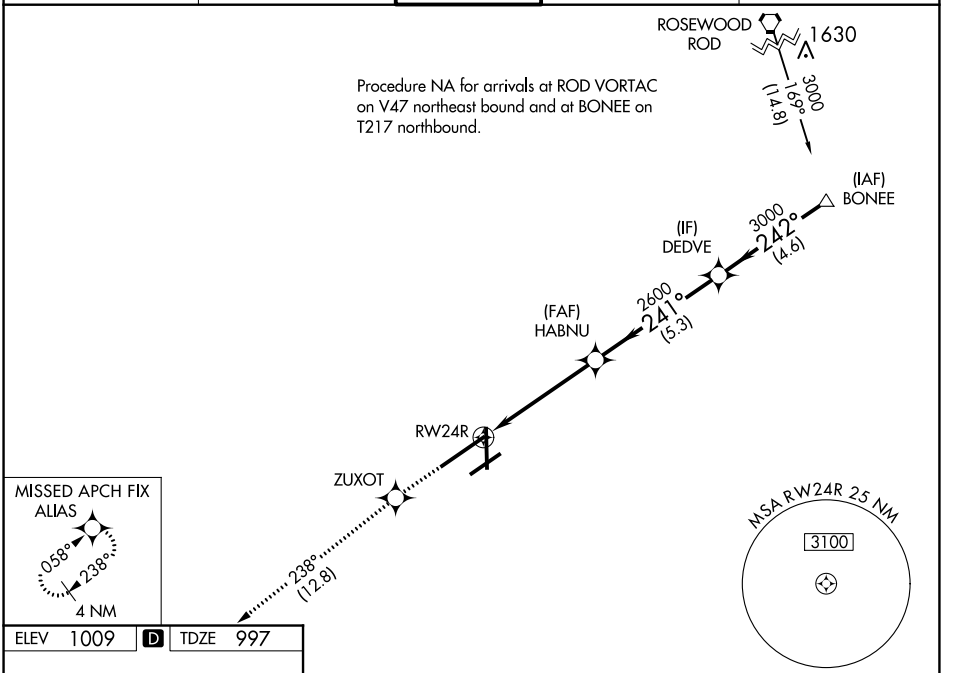

ELEV 1009 D TDZE 997



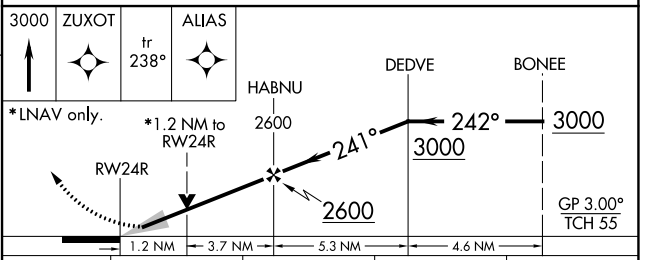

CATEGORY	A	B	C	D
LPV DA	1203/24	206 (200-½)		
LNAV/VNAV DA	1294/24	297 (300-½)		
LNAV MDA	1440/24	443 (500-½)	1440/45	443 (500-⅞)
C CIRCLING	1580-1	571 (600-1)	1580-1½ 571 (600-1½)	1640-2 631 (700-2)

HIRL all Rwys
TDZ/CL Rwy 6L
REIL Rwys 6R and 36

EC-2, 03 DEC 2020 to 31 DEC 2020
EC-2, 03 DEC 2020 to 31 DEC 2020