APP CRS	Rwy Idg	11200
230°	TDZE	783
	Apt Elev	796

RNAV (RNP) Z RWY 23R

INDIANAPOLIS INTL (IND)

For uncompensated Baro-VNAV systems, procedure NA below -18°C (0°F) or above 54°C (130°F). GPS Required. For inoperative ALS, increase RNP 0.15 all Cats visibility to RVR 6000 and increase RNP 0.30 all Cats visibility to 1⅜ SM. Simultaneous approach authorized.

MALSR

MISSED APPROACH: Climb to 1200 then climbing right turn to 3000 direct KEADY and hold.

D-ATIS	INDIANAPOLIS APP CON	INDY TOWER	GND CON	CLNC DEL	CPDLC
134.25	128.175 317.8	120.9 257.8	121.9	128.75 257.8	

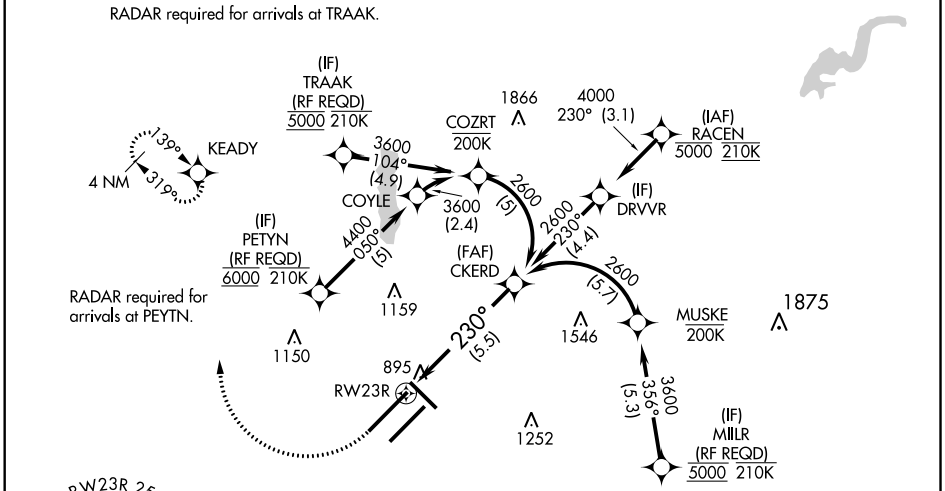

1200	3000	KEADY
↑	↱	✧

See planview for multiple IF locations.

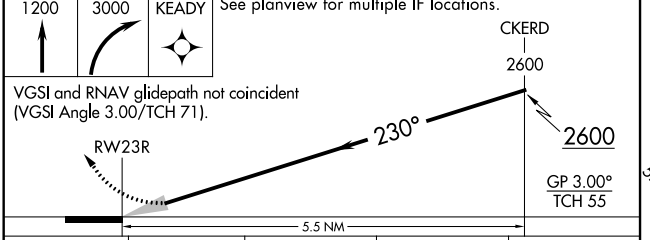

CATEGORY	A	B	C	D
RNP 0.15 DA		1147/40	364 (400-¾)	
RNP 0.30 DA		1206/50	423 (500-1)	

AUTHORIZATION REQUIRED

ELEV 796 D TDZE 783

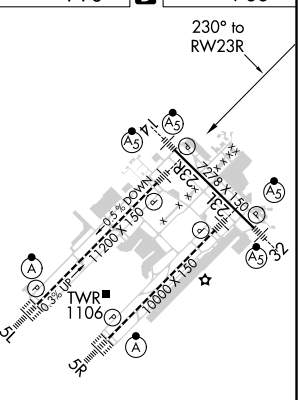

HIRL all Rwys
TDZ/CL Rwys 5L and 5R

EC-2, 03 DEC 2020 to 31 DEC 2020
EC-2, 03 DEC 2020 to 31 DEC 2020