RNAV (GPS) RWY 27

WARSAW MUNI (ASW)

WAAS	APP CRS		
CH **53519**	**272°**	Rwy Idg	**5100**
W27A		TDZE	**847**
		Apt Elev	**850**

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Goshen altimeter setting and increase all DA/MDA 40 feet. Circling to Rwy 36 NA at night. When VGSI inoperative, Circling Rwy 18 NA at night. Baro-VNAV and VDP NA when using Goshen altimeter setting.

MISSED APPROACH: Climb to 3000 direct HULIB and left turn on track 167° to CUDRU and hold.

AWOS-3	FORT WAYNE APP CON	CLNC DEL	UNICOM
121.125	**127.2 284.6**	**134.05**	**122.7** (CTAF) L

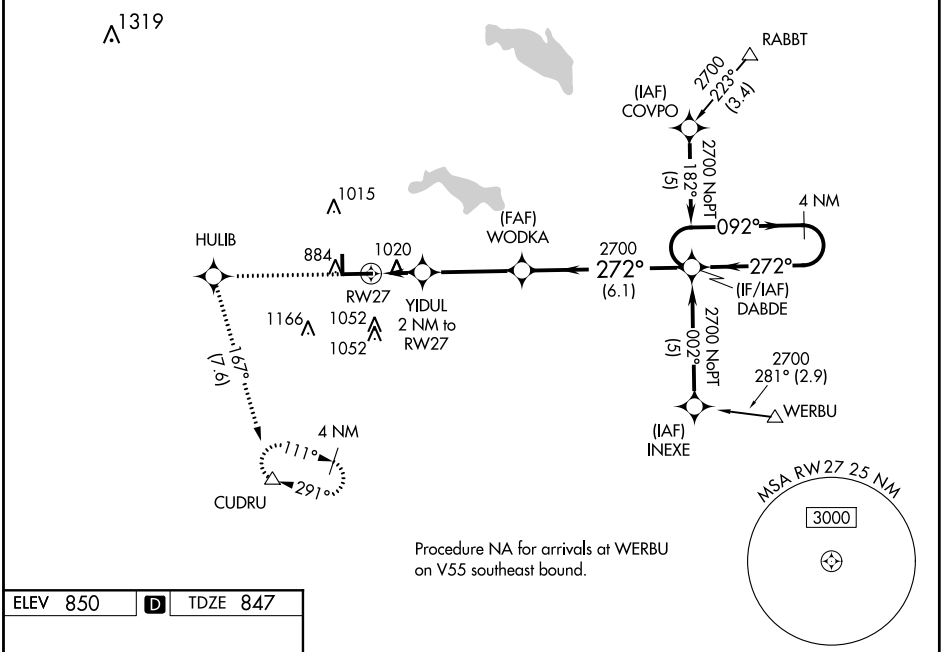

ELEV 850 D TDZE 847



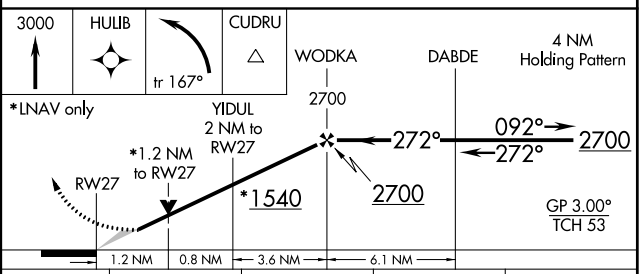

CATEGORY	A	B	C	D
LPV DA	1122-1 275 (300-1)			
LNAV/VNAV DA	1334-1¾ 487 (500-1¾)			
LNAV MDA	1280-1 433 (500-1)		1280-1¼ 433 (500-1¼)	1280-1½ 433 (500-1½)
CIRCLING	1320-1 470 (500-1)		1320-1½ 470 (500-1½)	1400-2 550 (600-2)

HIRL Rwy 9-27 L
MIRL Rwy 18-36 L
REIL Rwys 9 and 27 L

EC-2, 03 DEC 2020 to 31 DEC 2020
EC-2, 03 DEC 2020 to 31 DEC 2020