

WAAS CH 93699 W18A	APP CRS 185°	Rwy Idg TDZE Apt Elev	6503 866 866
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 18
METTEL FIELD (CEV)



RNP APCH.

NA For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. VDP and Baro-VNAV NA when using James M. Cox Dayton Intl altimeter setting. Circling Rwy 4, 22 NA at night. For inop ALS increase LPV all Cats visibility to 1 SM, LNAV/VNAV all Cats visibility to 1½ SM, and LNAV Cats A/B visibility to 1 SM. For inop ALS when using James M. Cox Dayton Intl altimeter setting, increase LPV all Cats visibility to 1 SM, LNAV/VNAV all Cats visibility to 1½ SM. When local altimeter setting not received, use James M. Cox Dayton Intl altimeter setting and increase all DA 121 feet and all MDA 140 feet: increase LPV and LNAV/VNAV all Cats and LNAV Cat C/D visibility ¾ SM, and Circling Cat C/D visibility ½ SM.

MALS R

MISSED APPROACH: Climb to 2800 direct WALAG and hold.

AWOS-3 118.325	COLUMBUS APP CON 118.425 352.05	UNICOM 122.8 (CTAF)
--------------------------	---	-------------------------------

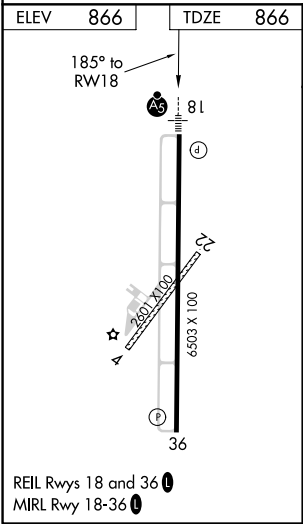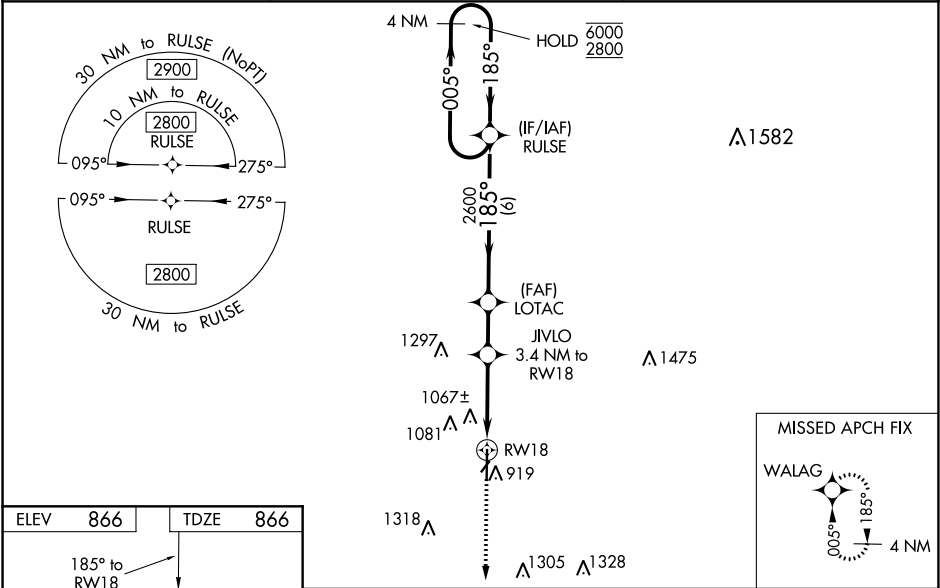

ELEV 866	TDZE 866
185° to RW18	81
2600	2000
1305	1328
919	
36	
REIL Rwy 18 and 36	
MIRL Rwy 18-36	

2800	WALAG	LOTAC	RULSE	4 NM Holding Pattern
*LNAV only	JIVLO 3.4 NM to RW18	2600	185°	6000
*1.3 NM to RW18	*2000	2600	005°	2800
1.3 NM	2.1 NM	1.9 NM	6 NM	GP 3.00°
1.3 NM	2.1 NM	1.9 NM	6 NM	TCH 46
CATEGORY	A	B	C	D
LPV DA	1116-½	250 (300-½)		
LNAV/VNAV DA	1385-1	519 (600-1)		
LNAV MDA	1320-½	454 (500-½)	1320-⅞	454 (500-⅞)
CIRCLING	1440-1 574 (600-1)	1540-1 674 (700-1)	1620-2¼ 754 (800-2¼)	1620-2½ 754 (800-2½)

EC-2, 03 DEC 2020 to 31 DEC 2020

EC-2, 03 DEC 2020 to 31 DEC 2020