RNAV (GPS) RWY 28

WAYNE COUNTY (BJJ)

WAAS	APP CRS	Rwy Idg	4971
CH 82215	277°	TDZE	1134
W28A		Apt Elev	1136

Baro-VNAV NA when using Akron-Canton Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Akron-Canton Rgnl altimeter setting and increase all DA/MDA 60 feet; increase LPV all Cats visibility ¼ mile. Increase LNAV/VNAV all Cats visibility and LNAV Cat C/D visibility ⅛ mile.

MISSED APPROACH: Climb to 3000 direct JAVNE and hold.

ASOS	CLEVELAND APP CON ★	CLNC DEL	UNICOM
118.075	118.6 371.875	121.75	122.8 (CTAF) L

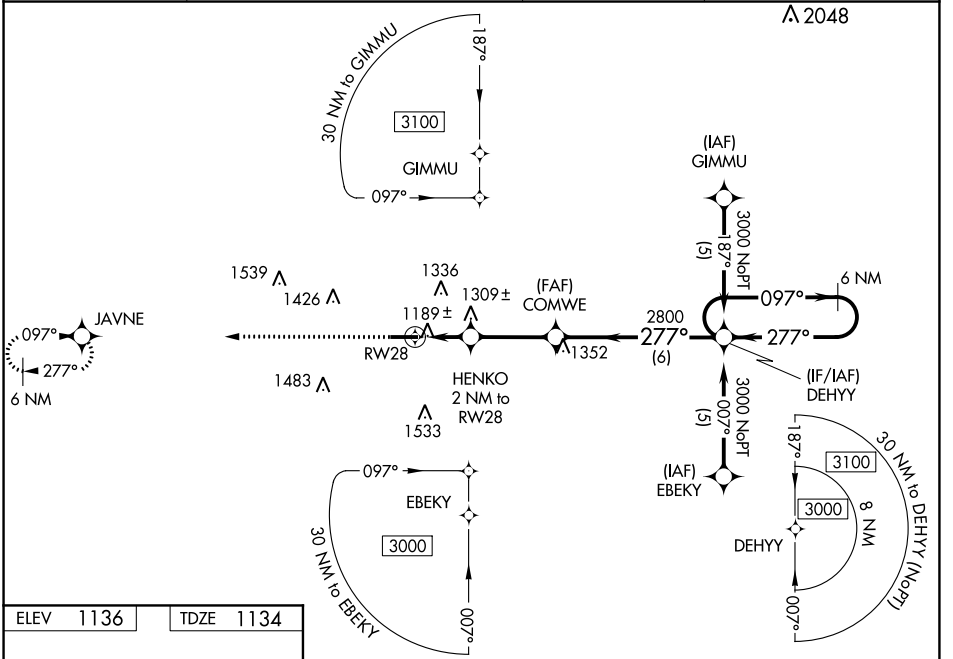

ELEV 1136	TDZE 1134

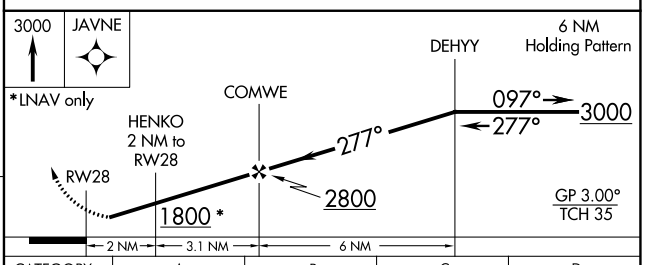

CATEGORY	A	B	C	D
LPV DA	1398-1 264 (300-1)			
LNAV/ VNAV DA	1589-1⅝ 455 (500-1⅝)			
LNAV MDA	1560-1 426 (500-1)		1560-1¼ 426 (500-1¼)	
CIRCLING	1600-1 464 (500-1)		1600-1½ 464 (500-1½)	1700-2 564 (600-2)

REIL Rwys 10 and 28 L
HIRL Rwy 10-28 L

EC-2, 03 DEC 2020 to 31 DEC 2020
EC-2, 03 DEC 2020 to 31 DEC 2020