


WAAS CH 90316 W25A	APP CRS 247°	Rwy Idg 5600 TDZE 765 Apt Elev 766
----------------------------------------	------------------------	---------------------------------------------------------------

RNAV (GPS) RWY 25
OHIO UNIVERSITY (UNI)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

MISSED APPROACH:
Climb to 3000 direct
CIMIX and hold.

AWOS-3 128.325	HUNTINGTON APP CON 120.95 270.1	CLNC DEL 120.95	UNICOM 123.075 (CTAF) 0
--------------------------	-------------------------------------------	---------------------------	-----------------------------------

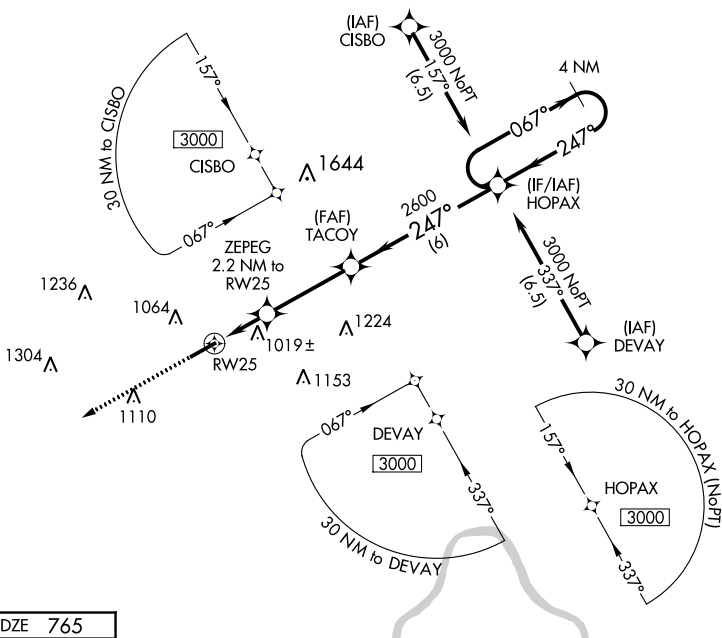

ELEV 766		TDZE 765
----------	--	----------

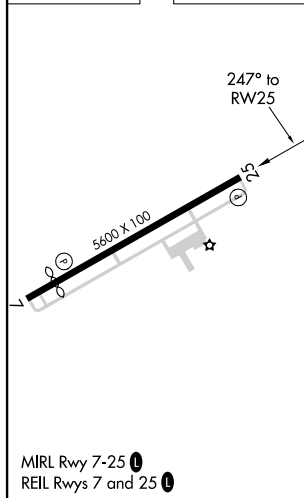

***LNNAV only**

ZEPEG
2.2 NM to RW25

TACOY
2600

HOPAX

4 NM Holding Pattern

067° → 3000

← 247°

247°

2600

1500*

RW25

*1.5 NM to RW25

GP 3.00°
TCH 49

CATEGORY	A	B	C	D
LPV DA	965-¾	200 (200-¾)		
LNAV/VNAV DA	1356-2	591 (600-2)		
LNAV MDA	1280-1 515 (600-1)	1280-1⅜ 515 (600-1⅜)		
C CIRCLING	1380-1 614 (700-1)	1420-1¾ 654 (700-1¾)	1480-2¼ 714 (800-2¼)	

RNAV (GPS) RWY 25