

APP CRS

319°

Rwy Idg

7801

TDZE

439

Apt Elev

459

RNAV (GPS) RWY 32L

SCOTT AFB/MIDAMERICA (BLV)

NA


ASR

DME/DME RNP-0.3 NA. For inoperative MALSR, increase LNAV Cat C/D visibility to 1½ mile.

MALSR

MISSED APPROACH: Climb to 1500 then climbing left turn to 2400 direct QODCU and hold.

D-ATIS ★ 128.7 256.7	ST LOUIS APP CON 125.2 281.5	SCOTT TOWER 128.25 253.5	GND CON 119.2 275.8	CLNC DEL 119.875 225.4 263.025
-------------------------	---------------------------------	-----------------------------	------------------------	-----------------------------------

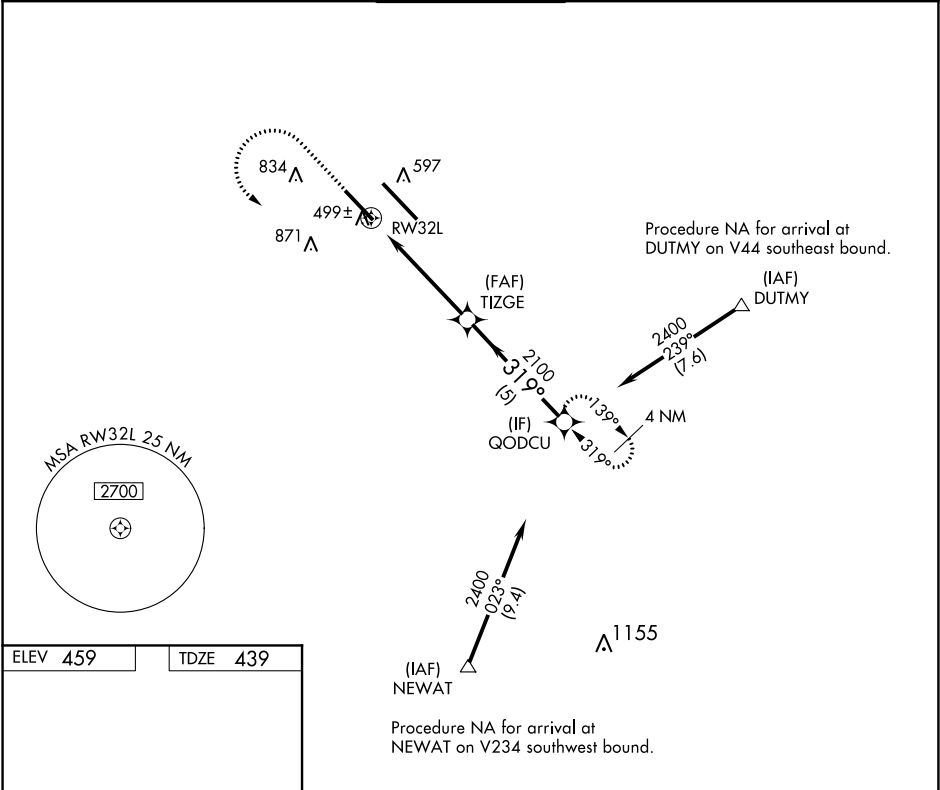

ELEV 459

TDZE 439

REIL Rwy 14L

HIRL Rwy 14R-32L and 14L-32R

1500

2400

QODCU

VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 72).

QODCU

1.3 NM to RW32L

1.3 NM

3.7 NM

5 NM

CATEGORY	A	B	C	D
LNAV MDA	920/24	481 (500-½)	920/50	481 (500-1)
CIRCLING	1000-1 541 (600-1)	1080-1 621 (700-1)	1240-2¼ 781 (800-2¼)	1240-2½ 781 (800-2½)