WAAS	APP CRS	Rwy Idg	9604
CH 60922	128°	TDZE	636
W13A		Apt Elev	661

RNAV (GPS) RWY 13

GENERAL DOWNING-PEORIA INTL (PIA)

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use Logan County altimeter setting and increase all DA 89 feet and all MDA 100 feet, increase LPV DA all Cats visibility to 1⅛ mile, LNAV/VNAV DA all Cats visibility to 1⅜ mile, LNAV MDA Cat C and D visibility to 1¼ mile, and Circling Cat C ¼ mile and Cat D ½ mile. Baro-VNAV and VDP NA when using Logan County altimeter setting. Circling Rwy 13, 31 NA at night.

MALSR

MISSED APPROACH: Climb to 2400 direct CASIP and hold.

ATIS	PEORIA APP CON	PEORIA TOWER	GND CON
126.1 282.2	125.8 269.2 (305°-125°) 124.675 317.55 (126°-304°)	124.0 353.85	121.85 348.6

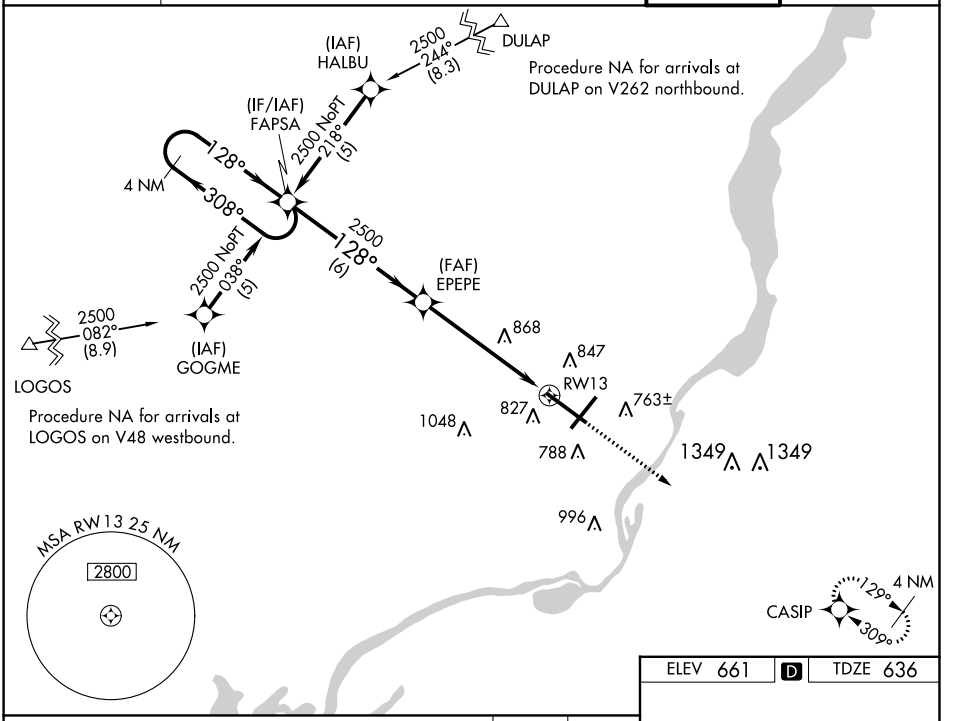

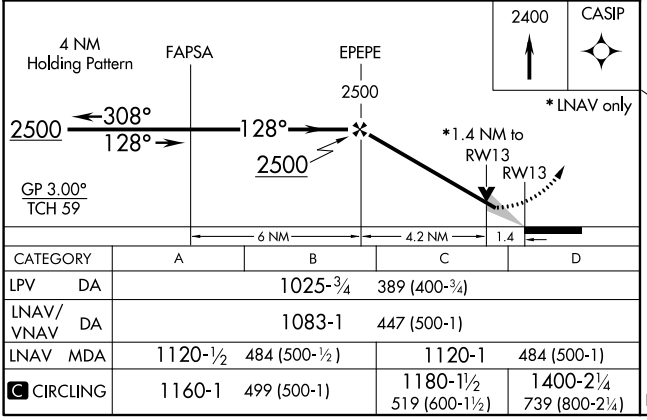

CATEGORY	A	B	C	D
LPV DA	1025-¾	389 (400-¾)		
LNAV/VNAV DA	1083-1	447 (500-1)		
LNAV MDA	1120-½	484 (500-½)	1120-1	484 (500-1)
C CIRCLING	1160-1	499 (500-1)	1180-1½ 519 (600-1½)	1400-2¼ 739 (800-2¼)

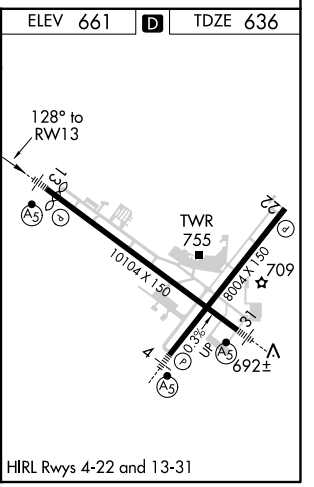

EC-3, 03 DEC 2020 to 31 DEC 2020
EC-3, 03 DEC 2020 to 31 DEC 2020