

WAAS CH 97619 W22A	APP CRS 224°	Rwy Idg TDZE Apt Elev	6501 750 755
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 22

UNIVERSITY OF ILLINOIS-WILLARD (CMI)


⚠

ASR


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Rantoul altimeter setting and increase all DA 41 feet and all MDA 60 feet; increase LNAV Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Rantoul altimeter setting.

MISSED APPROACH:
Climb to 2300 direct BOSTN and hold.

ATIS 124.85	CHAMPAIGN APP CON ★ 121.35 285.65 (319°-138°) 132.85 290.225 (139°-318°)	CHAMPAIGN TOWER ★ 120.4 (CTAF) 0 229.4	GND CON 121.8	CLNC DEL 128.75	UNICOM 122.95
-----------------------	--	--	-------------------------	---------------------------	-------------------------

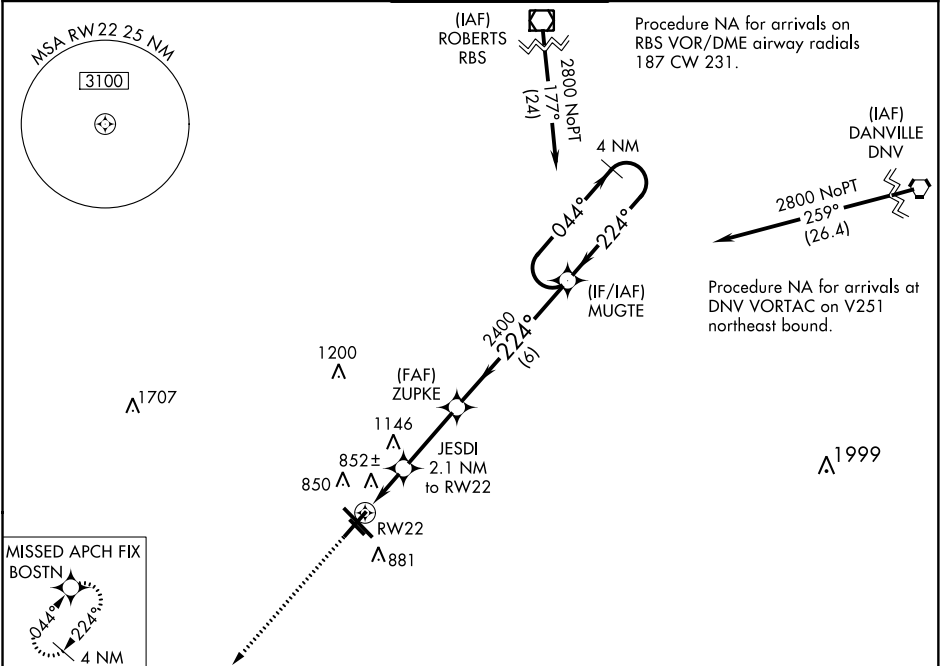

ELEV 755	D	TDZE 750
-----------------	----------	-----------------

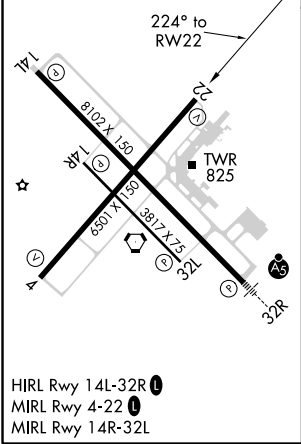

2300 BOSTN		MUGTE		4 NM Holding Pattern
* LNAV only.		JESDI 2.1 NM to RW22	ZUPKE 2400	MUGTE 2800
RW22 1 NM to RW22		* 1460	2400	GP 3.00° TCH 43
1 NM		1.1 NM	2.9 NM	6 NM
CATEGORY	A	B	C	D
LPV DA	1000-1		250 (300-1)	
LNAV/VNAV DA	1219-1¾		469 (500-1¾)	
LNAV MDA	1120-1		370 (400-1)	
CIRCLING	1240-1		1500-2¼	1500-2½
	485 (500-1)		745 (800-2¼)	745 (800-2½)