WAAS CH 40316 W22A	APP CRS 225°	Rwy Idg 3812 TDZE 821 Apt Elev 822

RNAV (GPS) RWY 22
CLINTONVILLE MUNI (CLI)

RNP APCH.

Baro-VNAV NA when using Green Bay altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Circling to Rwy 4-22 NA for Cat C. When local altimeter setting not received, use Green Bay altimeter setting and increase all DA/MDA 80 feet. Increase LPV and LNAV/VNAV all Cats visibility ¼ mile. Circling NA to Rwys 9 and 27. Circling Rwy 14 NA at night. Rwy 22 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 3000 direct HIDEV and hold.

AWOS-3	GREEN BAY APP CON ★	UNICOM
120.675	126.3 338.2	122.8 (CTAF) L

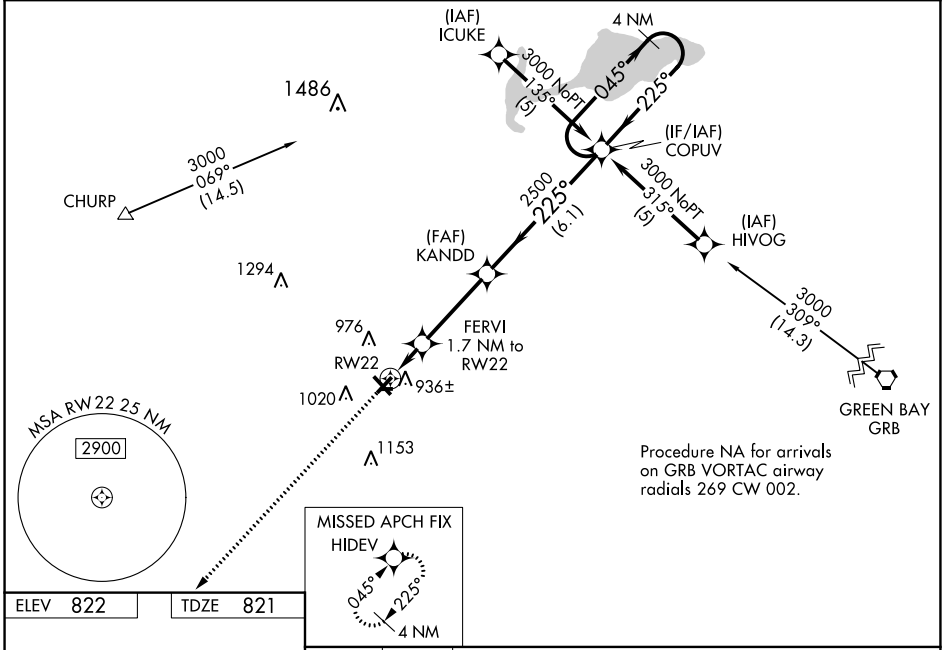

CATEGORY	A	B	C	D
LPV DA	1183-1¼ 362 (400-1¼)		NA	
LNAV/VNAV DA	1236-1½ 415 (500-1½)		NA	
LNAV MDA	1220-1 399 (400-1)		NA	
CIRCLING	1340-1 518 (600-1)		1340-1½ 518 (600-1½)	NA

REIL Rwy 32 L
MIRL Rwys 4-22 and 14-32 L

EC-3, 03 DEC 2020 to 31 DEC 2020
EC-3, 03 DEC 2020 to 31 DEC 2020