

WAAS CH 72707 W02A	APP CRS 023°	Rwy Idg TDZE Apt Elev	5197 826 827
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 2


JOHN F KENNEDY MEMORIAL (ASX)

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -28°C or above 54°C.
Rwy 2 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Ironwood altimeter setting. When local altimeter setting not received, use Ironwood altimeter setting and increase all DA 132 feet and all MDAs 140 feet; increase LPV all Cats and LNAV Cat C/D visibility ¾ SM, LNAV/VNAV all Cats and Circling Cat C/D visibility ½ SM.

MISSED APPROACH:
Climb to 3200 direct HOSUT and hold.

ASOS 126.775	MINNEAPOLIS CENTER 126.45 276.4	GCO 122.25	UNICOM 122.8 (CTAF) 0
------------------------	---	----------------------	---------------------------------

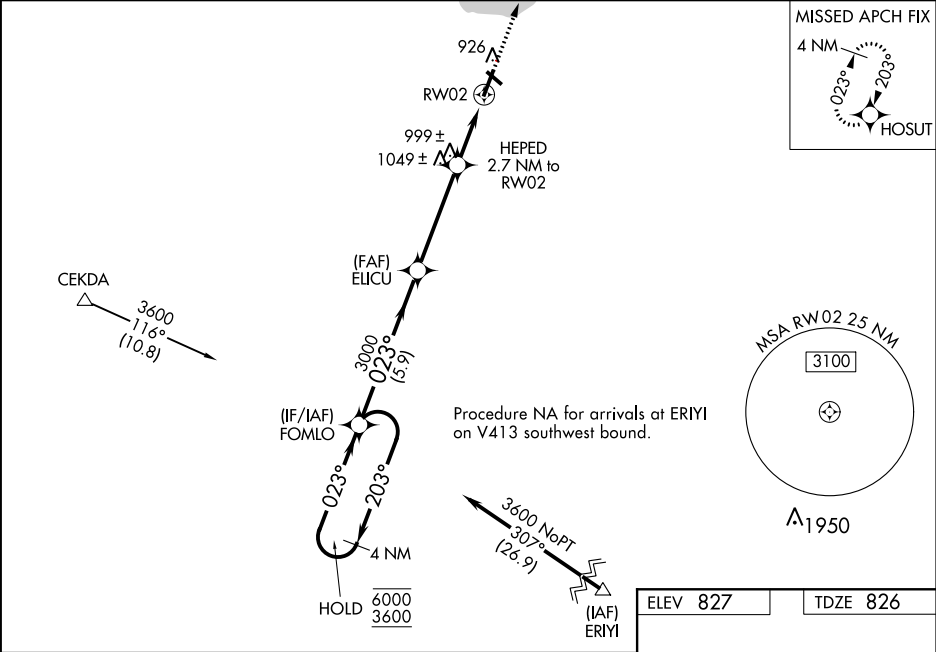

4 NM Holding Pattern		FOMLO	ELICU	HEPED 2.7 NM to RW02	3200 HOSUT
6000 ← 203°		023° → 3000	3000	*1.4 NM to RW02	*LNAV only
3600 ← 023°		023° → 3000	*1720	RW02	
GP 3.00° TCH 41		5.9 NM	4 NM	1.3	1.4
CATEGORY		A	B	C	D
LPV DA			1076-1	250 (300-1)	
LNAV/VNAV DA			1103-1	277 (300-1)	
LNAV MDA		1300-1	474 (500-1)	1300-1¾	474 (500-1¾)
CIRCLING		1300-1	473 (500-1)	1440-1¾	1560-2¼
				613 (700-1¾)	733 (800-2¼)

