
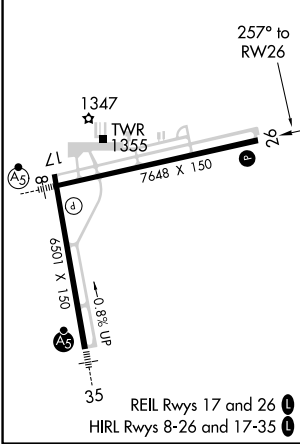


WAAS CH 58220 W26A	APP CRS 257°	Rwy Idg TDZE 1260 Apt Elev 1277
--	------------------------	---

RNAV (GPS) RWY 26
CENTRAL WISCONSIN (CWA)

RNP APCH. For uncompensated Baro-VNAV systems LNAV/VNAV NA below -17°C or above 54°C.	MISSED APPROACH: Climb to 3000 direct PLEAD and hold.
--	---

ATIS 127.45	MINNEAPOLIS CENTER 124.4 317.7	CWA TOWER★ 119.75 (CTAF) 0 360.7	GND CON 121.9 360.7	UNICOM 122.95
-----------------------	--	--	-------------------------------	-------------------------

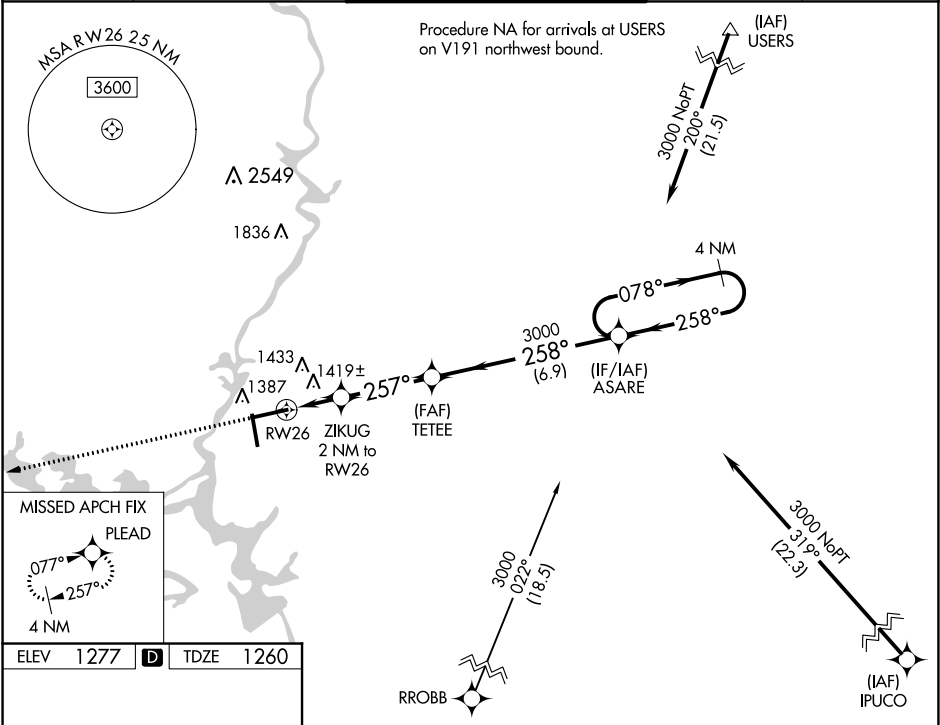

3000 ↑	PLEAD ✦				
* LNAV only.		* 1.2 NM to RW26			
RW26		ZIKUG 2 NM to RW26		ASARE 4 NM Holding Pattern	
		257°		258°	
		*1940		078° → 3000 ← 258°	
		3000		GP 3.00° TCH 45	
1.2 NM		0.8 NM		3.3 NM	
				6.9 NM	
CATEGORY		A	B	C	D
LPV DA		1510-¾		250 (300-¾)	
LNAV/VNAV DA		1730-1½		470 (500-1½)	
LNAV MDA		1680-1	420 (500-1)	1680-1½	420 (500-1½)
CIRCLING		1740-1	463 (500-1)	1740-1½ 463 (500-1½)	1840-2 563 (600-2)