


WAAS CH <b>93530</b> <b>W04A</b>	APP CRS <b>040°</b>	Rwy Idg TDZE <b>1168</b> Apt Elev <b>1171</b>
----------------------------------------	------------------------	-----------------------------------------------------

RNAV (GPS) RWY 4  
IOWA COUNTY (MRJ)

Baro-VNAV NA when using Platteville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). When local altimeter setting not received, use Platteville altimeter setting and increase all DA 55 feet, increase LPV all Cats visibility ½ mile and LNAV/VNAV all Cats visibility ¼ mile, increase all MDA 60 feet, and LNAV Cat C visibility ¼ mile. DME/DME RNP-0.3 NA.

MISSED APPROACH:  
Climb to 3600 direct ZOBIK and hold.

AWOS-3 <b>118.525</b>	CHICAGO CENTER <b>133.95 281.4</b>	UNICOM <b>122.8 (CTAF) 0</b>
--------------------------	---------------------------------------	---------------------------------

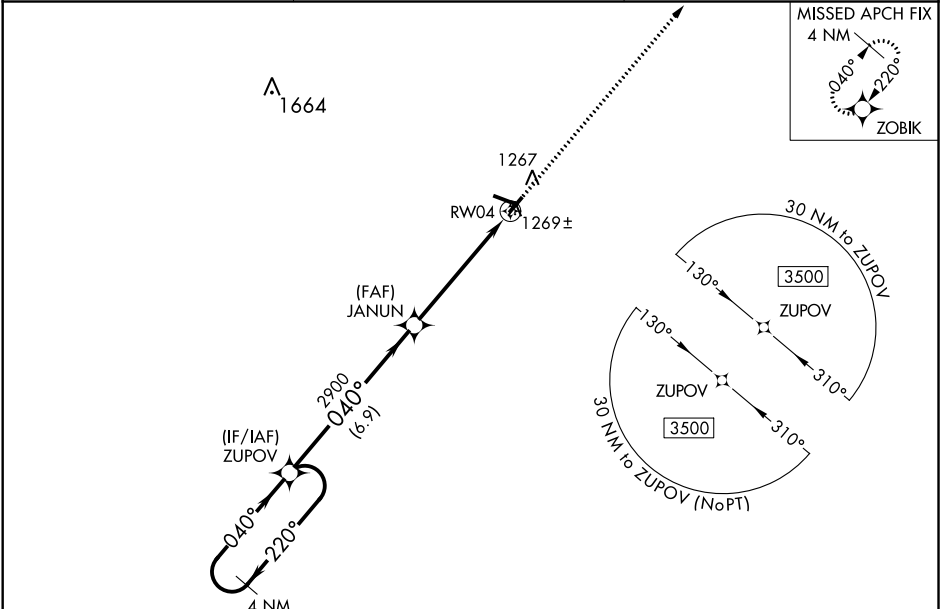

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 31).		ELEV 1171	TDZE 1168
ZUPOV		JANUN 2900		ZOBIK	
3500 ← 220° 040° →		040°		* LNAV only	
GP 3.00° TCH 40		2900		* 1.2 NM to RWY 04	
6.9 NM		4.1 NM		1.2 NM	
CATEGORY	A	B	C	D	
LPV DA	1368-¾ 200 (200-¾)			NA	
LNAV/VNAV DA	1443-7/8 275 (300-7/8)			NA	
LNAV MDA	1580-1	412 (500-1)	1580-1 1/8 412 (500-1 1/8)	NA	
CIRCLING	1620-1 449 (500-1)	1640-1 469 (500-1)	1640-1 1/2 469 (500-1 1/2)	NA	

