MINNEAPOLIS EIGHT DEPARTURE

AL-264 (FAA) MINNEAPOLIS, MINNESOTA

TOP ALTITUDE: (JETS) 7000/ (PROPS) 5000

D-ATIS DEP
120.8
CLNC DEL
133.2
CPDLC
MINNEAPOLIS TOWER
123.95 273.55 (12L-30R)
126.7 273.55 (12R-30L, 4-22)
123.675 273.55 (17-35)
MINNEAPOLIS DEP CON
SOUTH/EAST 124.7 284.7
NORTH/WEST 125.75 335.65

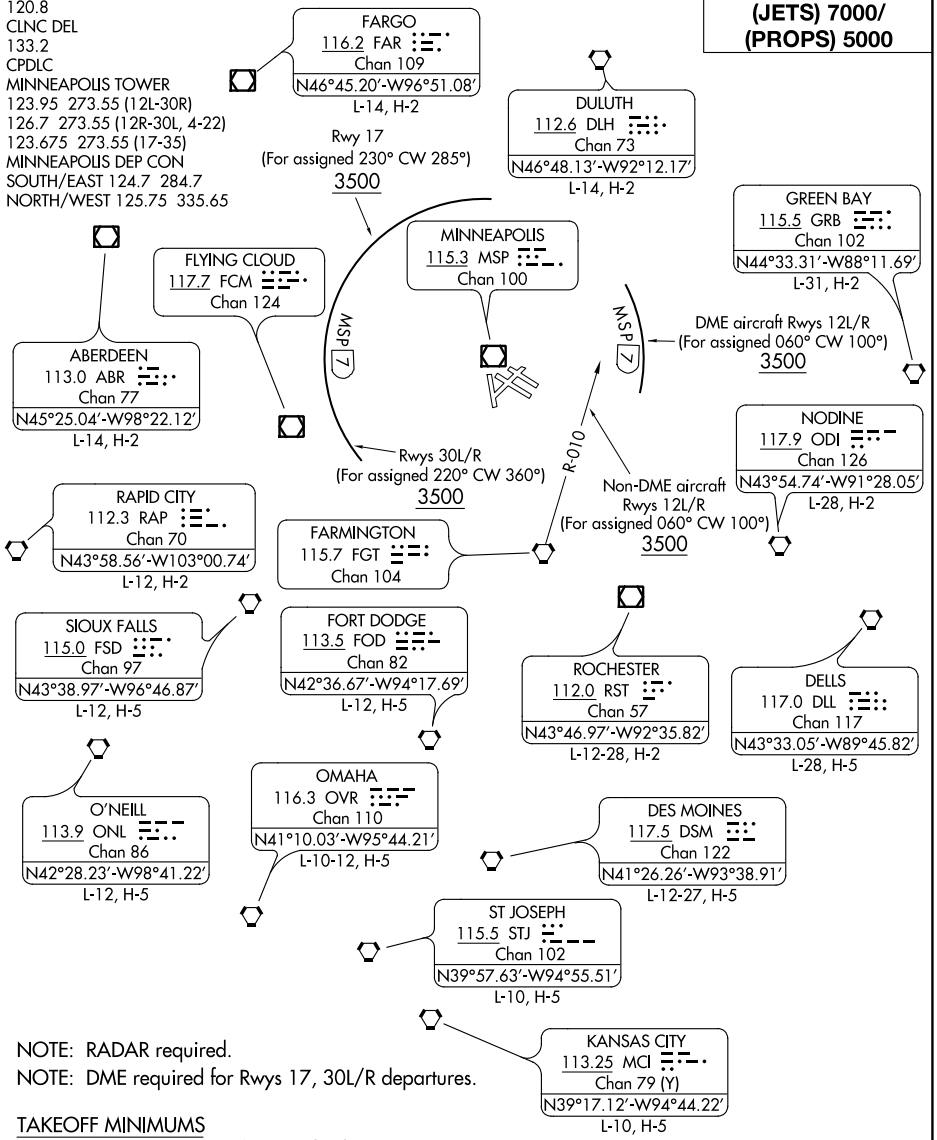

NOTE: RADAR required.

NOTE: DME required for Rwys 17, 30L/R departures.

TAKEOFF MINIMUMS

Rwys 4, 12R, 17, 22, 30L/R: Standard.

Rwy 12L: 300-1½ or standard with minimum climb of 207′ per NM to 1100, or alternatively, with standard takeoff minimums and a normal 200′ per NM climb gradient, takeoff must occur no later than 1300′ prior to DER.

Rwy 35: Standard with minimum climb of 219′ per NM to 2100.

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

NC-1, 03 DEC 2020 to 31 DEC 2020