



WAAS CH <b>56225</b> <b>W30A</b>	APP CRS <b>301°</b>	Rwy Idg <b>10000</b> TDZE <b>823</b> Apt Elev <b>842</b>
--	------------------------	--

RNAV (GPS) Z RWY 30L  
MINNEAPOLIS-ST PAUL INTL/WOLD-CHAMBERLAIN (MSP)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C (-2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Simultaneous approaches authorized with Rwy 30R and ILS V RWY 35 (CONVERGING). Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations. For inop ALS, increase LPV Cat E visibility to RVR 4000, increase LNAV/VNAV Cat E visibility to RVR 5000, and LNAV Cat E visibility to 1 3⁄8 SM.

ALSIF-2  
MISSED APPROACH:  
Climb to 3000 direct  
WOXEB and hold.

D-ATIS ARR <b>135.35 239.275</b> DEP <b>120.8</b>	MINNEAPOLIS APP CON <b>118.725 335.65</b> (Rwy 35) <b>119.3 335.65</b> (12L-30R, 4-22, 17) <b>126.95 335.65</b> (12R-30L)	MINNEAPOLIS TOWER <b>123.675 273.55</b> (17-35) <b>123.95 273.55</b> (12L-30R) <b>126.7 273.55</b> (12R-30L, 4-22)	GND CON <b>N 121.8 348.6</b> <b>S 121.9 348.6</b> <b>W 127.925 348.6</b>	CLNC DEL <b>133.2</b>
---	--	---	---	--------------------------

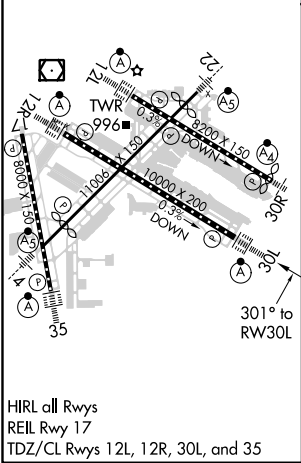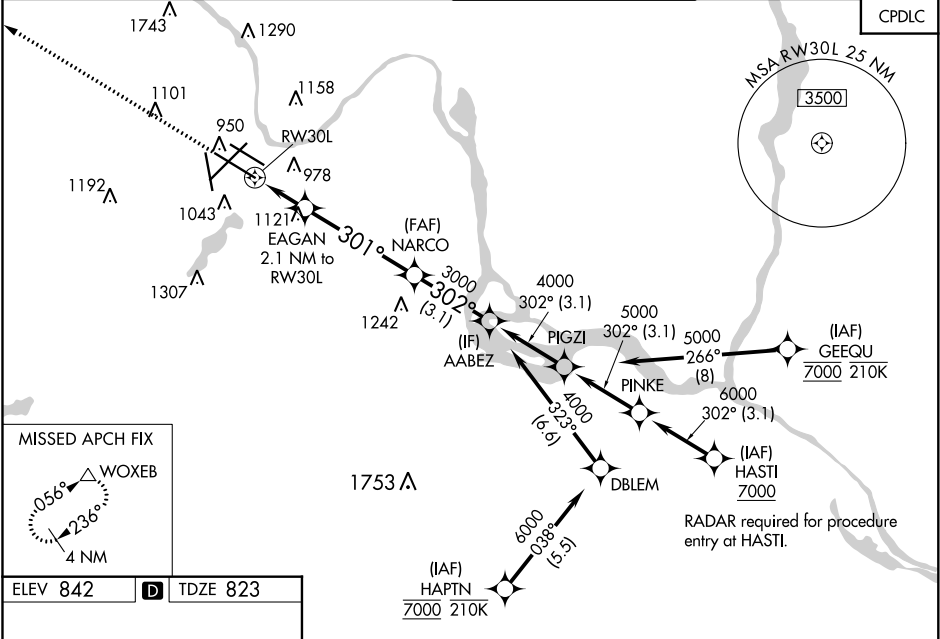

ELEV 842	D	TDZE 823
HIRL all Rwys REIL Rwy 17 TDZ/CL Rwys 12L, 12R, 30L, and 35		
MINNEAPOLIS, MINNESOTA		
Amdt 5A 17AUG17		
MINNEAPOLIS-ST PAUL INTL/WOLD-CHAMBERLAIN (MSP)		
44°53'N-93°13'W		
RNAV (GPS) Z RWY 30L		