LOC I-ABK	APP CRS	Rwy Idg	7400
109.1	133°	TDZE	1184
		Apt Elev	1185

ILS or LOC/DME RWY 13

FALLS INTL-EINARSON FIELD (INL)

T A -31°C

When local altimeter setting not received, use Baudette altimeter setting and increase DAs 127 feet and S-ILS 13 visibility ¼ mile all Cats, increase all MDAs 140 feet and S-LOC 13 Cat B visibility ¼ mile, Cat C and D ½ mile, increase Circling Cat B visibility ¼ mile, Cat C and D ½ mile. For inoperative MALSR when using Baudette altimeter setting, increase S-ILS 13 visibility ½ mile all Cats. ADF required. Circling to Rwy 4-22 NA at night. DME from INL VORTAC. Simultaneous reception of I-ABK and INL DME required. Caution opposing ILS continously on.

MALSR

MISSED APPROACH: Climb to 3400 direct IN LOM and hold.

ASOS	MINNEAPOLIS CENTER	UNICOM
120.0	120.9 377.1	122.8 (CTAF) L

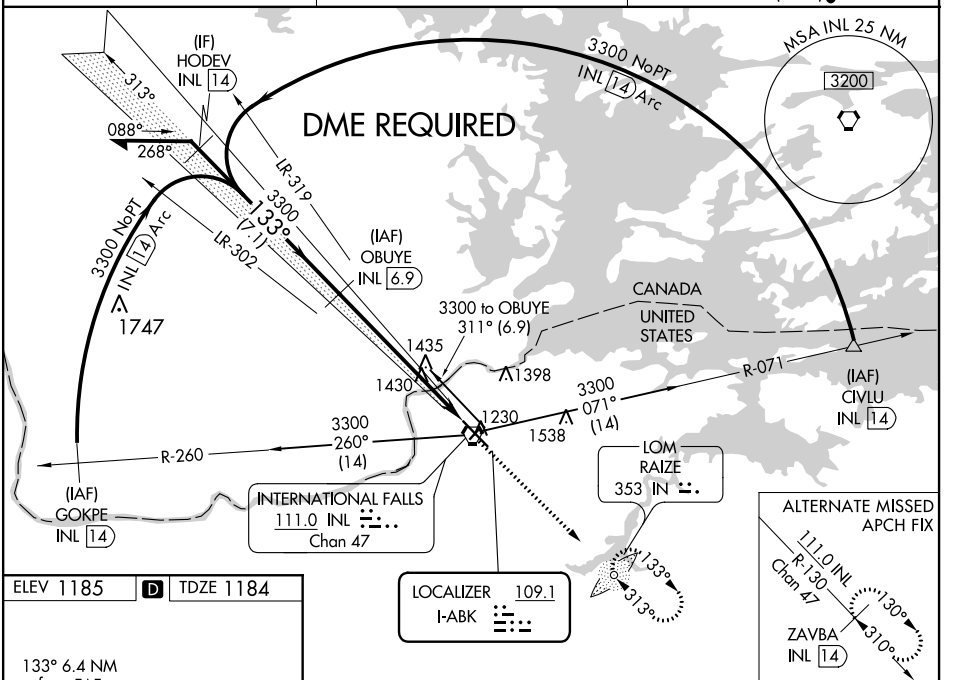

ELEV 1185 D TDZE 1184

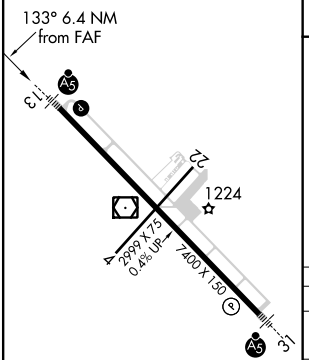

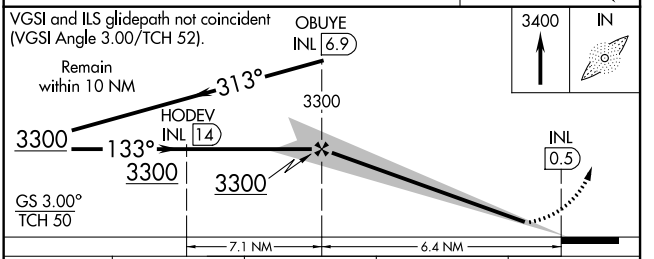

CATEGORY	A	B	C	D
S-ILS 13	1384-½ 200 (200-½)			
S-LOC 13	1820-½ 636 (700-½)		1820-1¼ 636 (700-1¼)	1820-1½ 636 (700-1½)
CIRCLING	1820-1 635 (700-1)		1820-1¾ 635 (700-1¾)	1820-2 635 (700-2)

NC-1, 03 DEC 2020 to 31 DEC 2020
NC-1, 03 DEC 2020 to 31 DEC 2020