WAAS	APP CRS		
CH 53706	133°	Rwy Idg	7400
W13A		TDZE	1184
		Apt Elev	1185

RNAV (GPS) RWY 13

FALLS INTL-EINARSON FIELD (INL)

T A W -31°C

When local altimeter setting not received, use Baudette altimeter setting and increase all DAs 127 feet, increase LPV visibility ¼ mile all Cats, and LNAV/VNAV visibility ¾ mile all Cats, increase all MDAs 140 feet, increase LNAV Cat C and D visibility ½ mile, Circling Cat C visibility ½ mile and Cat D visibility ¼ mile. For inoperative MALSR when using Baudette altimeter setting, increase LPV visibility ½ mile all Cats, inoperative table does not apply to LNAV/VNAV. VDP NA when using Baudette altimeter setting. Baro-VNAV NA when using Baudette altimeter setting. Circling to Rwy 4-22 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 47°C (116°F). DME/DME RNP- 0.3 NA.

MALSR

MISSED APPROACH: Climb to 3400 direct ZAVBA and hold.

ASOS	MINNEAPOLIS CENTER	UNICOM
120.0	120.9 377.1	122.8 (CTAF) L

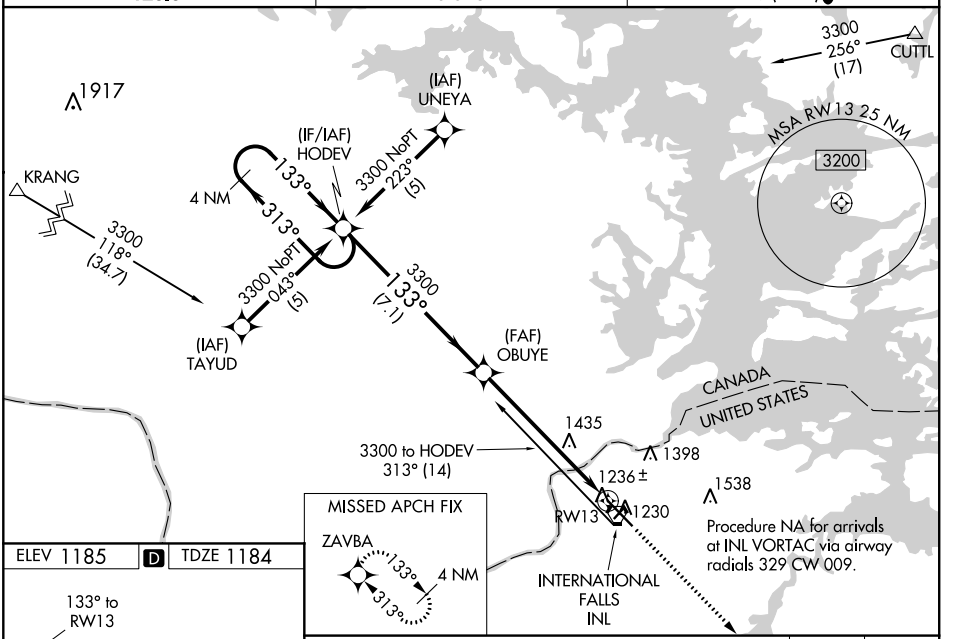

CATEGORY	A	B	C	D
LPV DA	1434-½ 250 (300-½)			
LNAV/VNAV DA	1669-1¼ 485 (500-1¼)			
LNAV MDA	1760-½ 576 (600-½)		1760-1 576 (600-1)	1760-1¼ 576 (600-1¼)
CIRCLING	1760-1 575 (600-1)		1760-1½ 575 (600-1½)	1780-2 595 (600-2)

NC-1, 03 DEC 2020 to 31 DEC 2020
NC-1, 03 DEC 2020 to 31 DEC 2020