RNAV (GPS) RWY 31

RANGE RGNL (HIB)

WAAS	APP CRS	Rwy Idg	6758
CH 65722	310°	TDZE	1345
W31A		Apt Elev	1354

-31°C

Circling to Rwy 4 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 35°C (95°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA when using Eveleth altimeter setting. When local altimeter setting not received, use Eveleth altimeter setting and increase all DA 36 feet and all MDA 40 feet. For inop MALSRs increase LNAV/VNAV all Cats visibility to ¾ mile, LNAV Cat C/D to 1 mile. For inop MALSRs when using Eveleth altimeter setting, increase LNAV/VNAV all Cats visibility to ⅞ mile.

MALSR

MISSED APPROACH: Climb to 3500 direct FENOK and hold.

ASOS	DULUTH APP CON	CLNC DEL	UNICOM
126.425	125.45 233.7	127.4	123.0 (CTAF) L

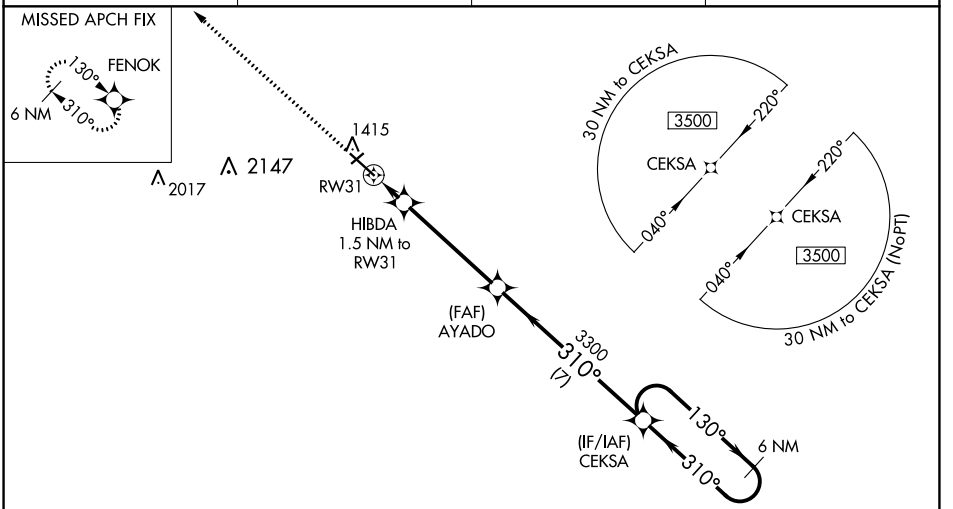

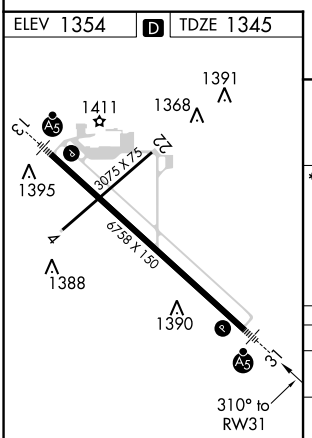

HIRL Rwy 13-31 L

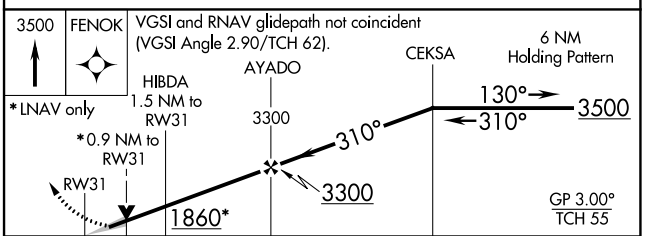

CATEGORY	A	B	C	D
LPV DA	1545-½ 200 (200-½)			
LNAV/VNAV DA	1595-½ 250 (300-½)			
LNAV MDA	1680-½ 335 (400-½)		1680-⅝ 335 (400-⅝)	
CIRCLING	1820-1 466 (500-1)	1840-1 486 (500-1)	1840-1½ 486 (500-1½)	1920-2 566 (600-2)

NC-1, 03 DEC 2020 to 31 DEC 2020
NC-1, 03 DEC 2020 to 31 DEC 2020