

VOR/DME DVL	APP CRS	Rwy Idg	4314
111.0	030°	TDZE	1450
Chan 47		Apt Elev	1470

VOR RWY 3

DEVILS LAKE RGNL (DVL)


T

A

When local altimeter setting not received, use Cando altimeter setting and increase all MDA 80 feet, increase S-3 Cat A and Circling Cats C/D visibility ¼ SM, CAMPG fix minimums S-3 Cats C/D visibility ¾ SM and Circling Cats C/D visibility ¼ SM. Helicopter visibility reduction below 1 SM NA.

MISSED APPROACH: Climb to 3000 then climbing right turn to 3500 direct DVL VOR/DME and hold.

AWOS-3PT 125.875	MINNEAPOLIS CENTER 124.2 270.3	UNICOM 122.8 (CTAF) 0
---------------------	-----------------------------------	--------------------------

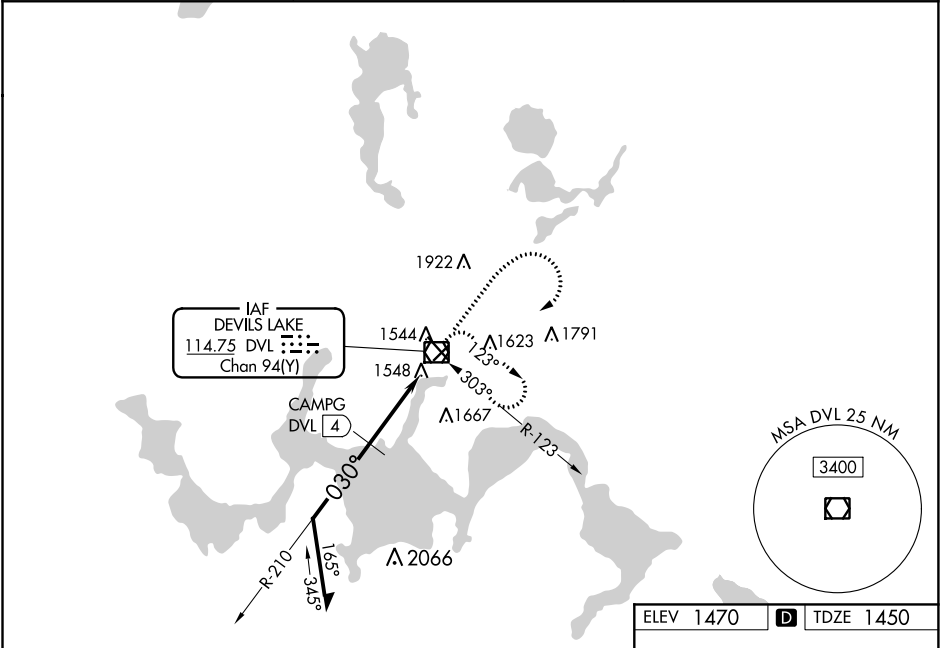

Remain within 10 NM

3300

210°

030°

CAMPG DVL 4

2320

4 NM

DVL VOR/DME

3000

3500

DVL

\*2400 when using Cando altimeter setting.

CATEGORY	A	B	C	D
S-3	2320-1 870 (900-1)	2320-1¼ 870 (900-1¼)	2320-2½ 870 (900-2½)	
CIRCLING	2320-1¼ 850 (900-1¼)		2320-2¾ 850 (900-2¾)	2320-3¼ 850 (900-2¾)
CAMPG FIX MINIMUMS				
S-3	1820-1 370 (400-1)			
CIRCLING	2000-1 530 (600-1)		2240-2¼ 770 (800-2¼)	2240-2½ 770 (800-2½)

