WAAS CH 93732 W32A	APP CRS 322°	Rwy ldg 4002 TDZE 1131 Apt Elev 1136

RNAV (GPS) RWY 32
MORRIS MUNI-CHARLIE SCHMIDT FIELD (MOX)

RNP APCH.

Circling NA to Rwys 4 and 22. Baro-VNAV and VDP NA when using Benson altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Benson altimeter setting and increase LPV DA to 1440 feet, LNAV/VNAV DA to 1594 feet and all MDA 60 feet and increase LNAV and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 3000 direct ZITOG and hold.

AWOS-3	MINNEAPOLIS CENTER	UNICOM
109.6	126.1 269.2	122.8 (CTAF) L

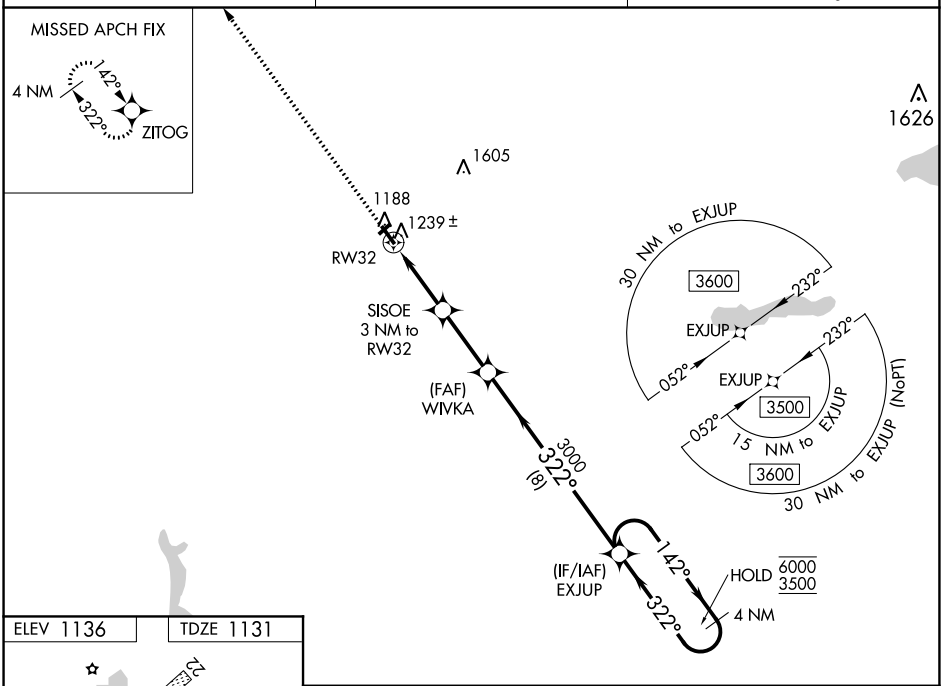

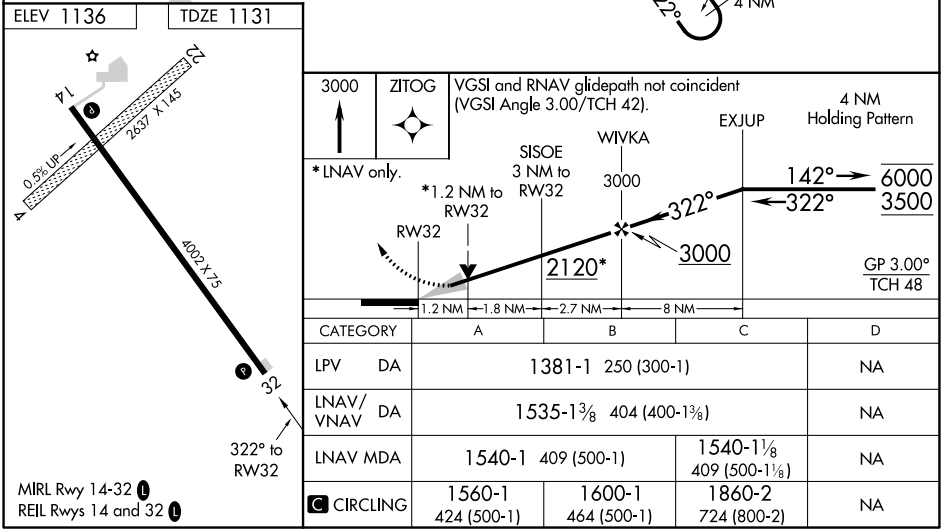

CATEGORY	A	B	C	D
LPV DA	1381-1 250 (300-1)			NA
LNAV/VNAV DA	1535-1⅜ 404 (400-1⅜)			NA
LNAV MDA	1540-1 409 (500-1)		1540-1⅛ 409 (500-1⅛)	NA
C CIRCLING	1560-1 424 (500-1)	1600-1 464 (500-1)	1860-2 724 (800-2)	NA

MIRL Rwy 14-32 L
REIL Rwys 14 and 32 L

NC-1, 03 DEC 2020 to 31 DEC 2020

NC-1, 03 DEC 2020 to 31 DEC 2020