RNAV (GPS) RWY 36

PIPESTONE MUNI (PQN)

WAAS	APP CRS	Rwy Idg	4306
CH 69332	001°	TDZE	1734
W36A		Apt Elev	1737

Circling NA to Rwy's 9 and 27. For uncompensated Baro-VNAV systems, LNAV-VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Slayton altimeter setting and increase all DA 68 feet and all MDA 80 feet; increase LPV all Cats visibility ⅛ mile and LNAV/VNAV all Cats, LNAV Cat C and Circling Cat C visibility ¼ mile. Baro-VNAV and VDP NA with Slayton altimeter setting.

MISSED APPROACH: Climb to 3800 direct SAKNE and hold.

AWOS-3	MINNEAPOLIS CENTER	GCO	UNICOM
118.375	132.05 317.4	121.725	122.8 (CTAF) L

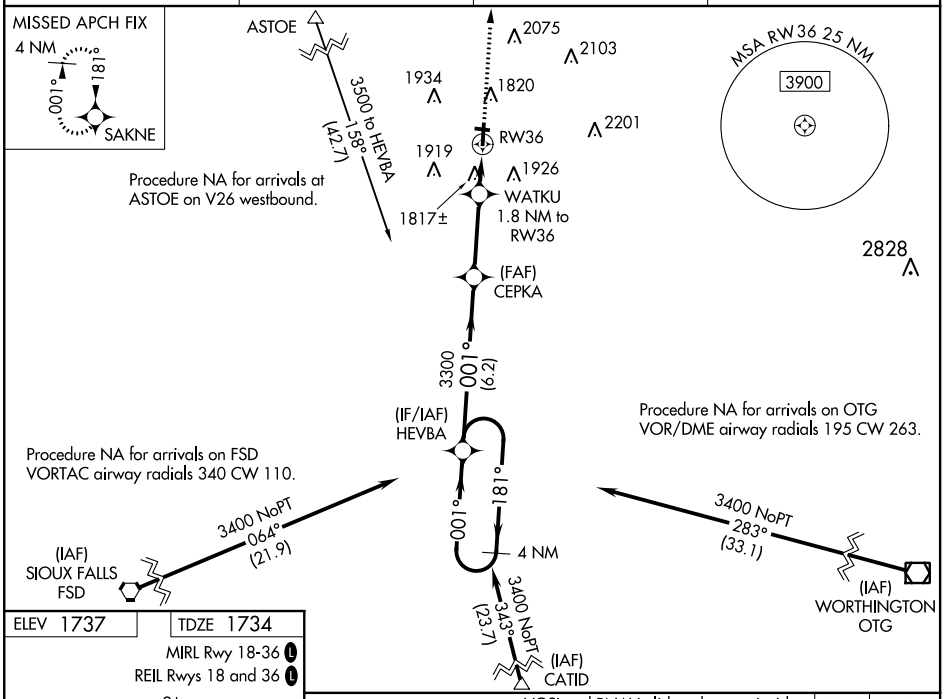

ELEV 1737 TDZE 1734

MIRL Rwy 18-36 L

REIL Rwys 18 and 36 L

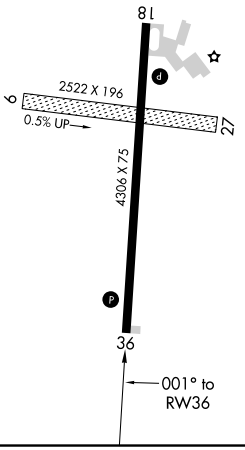

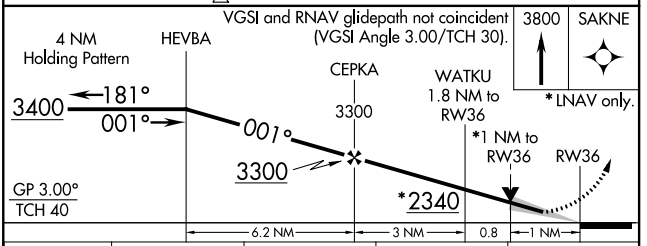

CATEGORY	A	B	C	D
LPV DA	1934-1 200 (200-1)			NA
LNAV/VNAV DA	1984-1 250 (300-1)			NA
LNAV MDA	2080-1 346 (400-1)			NA
CIRCLING	2200-1 463 (500-1)		2280-1½ 543 (600-1½)	NA

NC-1, 03 DEC 2020 to 31 DEC 2020
NC-1, 03 DEC 2020 to 31 DEC 2020