

WAAS
CH **49210**
W14A

APP CRS
138°

Rwy Idg
TDZE **1039**
Apt Elev **1039**

RNAV (GPS) RWY 14

BENSON MUNI (BBB)

RNP APCH.


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Baro-VNAV and VDP NA when using Appleton altimeter setting. When local altimeter setting not received, use Appleton altimeter setting and increase all DA and MDA 40 feet.

MISSED APPROACH: Climb to 2700 direct FETUD and hold.

AWOS-3 118.45	MINNEAPOLIS CENTER 125.5 323.1	UNICOM 122.8 (CTAF) 1
-------------------------	--	---------------------------------

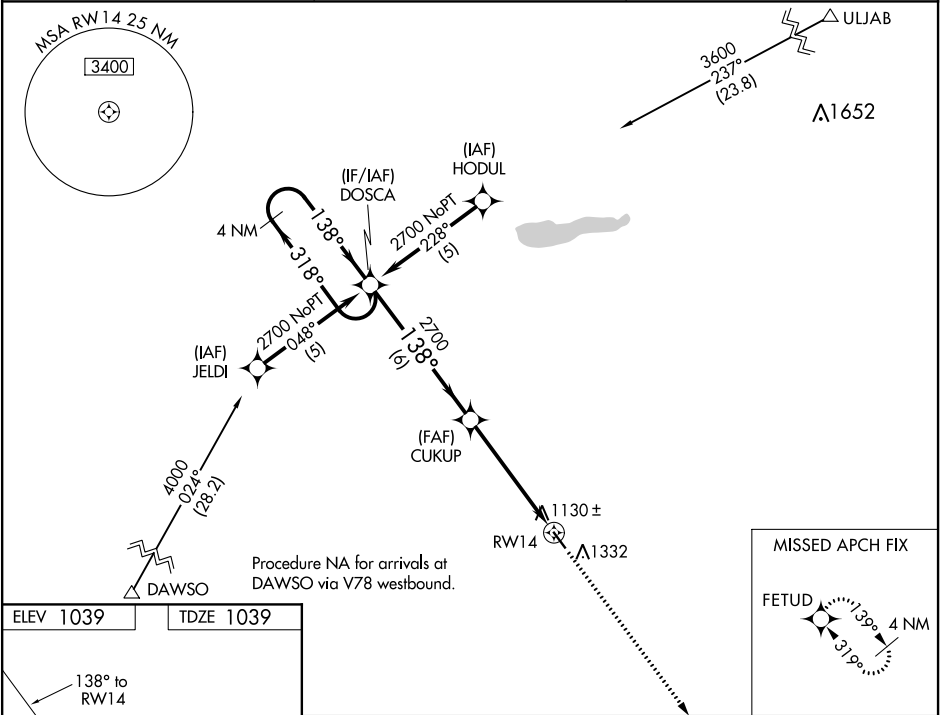

ELEV 1039

TDZE 1039

138° to RWY 14

4000 X 75

MIRL Rwy 14-32 1

REIL Rwy 14 and 32 1

	DOSCA	CUKUP	2700	FETUD
	4 NM Holding Pattern			
	2700 ← 318°	138° →		
	138° →	2700		
	GP 3.00°			
	TCH 40			
	6 NM	3.5 NM	1.5 NM	
CATEGORY	A	B	C	D
LPV DA	1382-1¼	343 (400-1¼)	NA	
LNAV/VNAV DA	1426-1½	387 (400-1½)	NA	
LNAV MDA	1540-1	501 (600-1)	NA	