WAAS	APP CRS	Rwy Idg	4499
CH 78431	299°	TDZE	2573
W29A		Apt Elev	2573

RNAV (GPS) RWY 29

LEMMON MUNI (LEM)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Hettinger altimeter setting. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Hettinger altimeter setting and increase all DA 74 feet and all MDA 80 feet and increase LPV and LNAV/VNAV all Cats visibility ⅛ mile and LNAV Cats C/D and Circling Cats C/D visibility ¼ mile.

MISSED APPROACH: Climb to 3300 then climbing right turn to 4500 direct CODTO and hold.

MINNEAPOLIS CENTER	AUNICOM
124.25 236.825	122.8 (CTAF) L

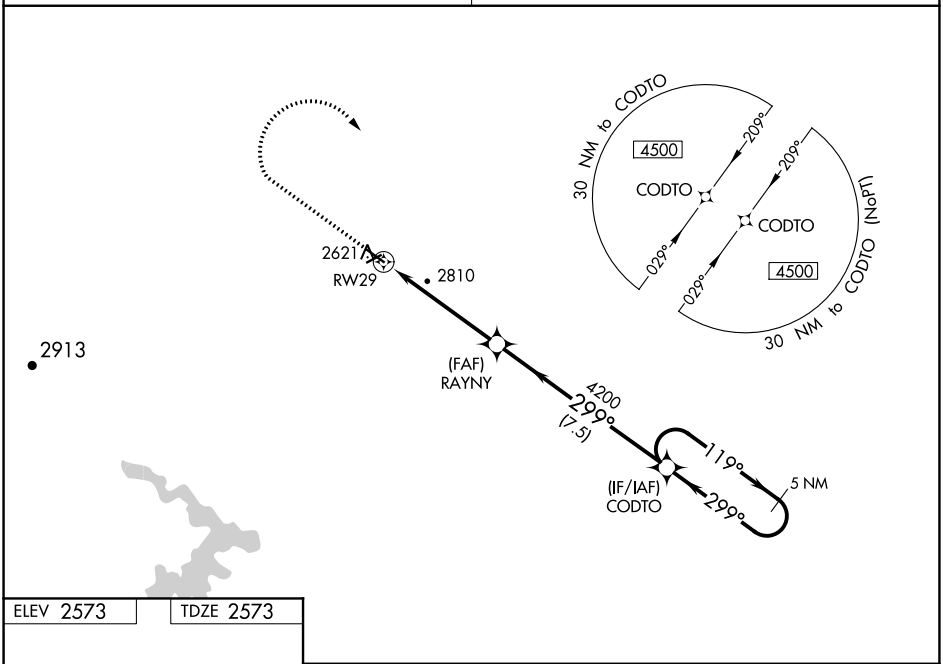

ELEV 2573 TDZE 2573



MIRL Rwy 11-29 L

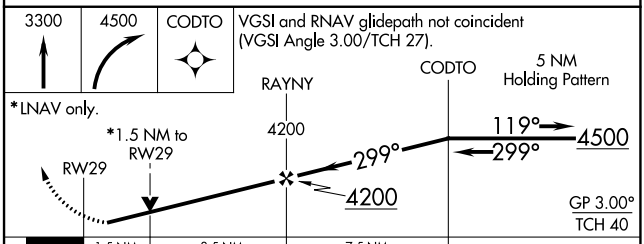

CATEGORY	A	B	C	D
LPV DA	2823-1 250 (300-1)			
LNAV/VNAV DA	2831-1 258 (300-1)			
LNAV MDA	3060-1 487 (500-1)		3060-1⅜ 487 (500-1⅜)	
C CIRCLING	3220-1 647 (700-1)		3280-2 707 (800-2)	3280-2¼ 707 (800-2¼)

NC-1, 03 DEC 2020 to 31 DEC 2020
NC-1, 03 DEC 2020 to 31 DEC 2020