RNAV (GPS) RWY 30

MYERS FIELD (CNB)

WAAS	APP CRS		
CH **77718**	**298°**	Rwy Idg	**4409**
W30A		TDZE	**1192**
		Apt Elev	**1194**

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. Baro-VNAV NA when using Lac Qui Parle County altimeter setting. When local altimeter setting not received, use Lac Qui Parle County altimeter setting and increase all DA 53 feet, and all MDA 60 feet, increase LNAV Cats C and D visibility ¼ mile.

MISSED APPROACH: Climb to 3700 direct EDAYU and hold.

AWOS-3	MINNEAPOLIS CENTER	CTAF
118.575	**128.5 306.2**	**122.9** (L)

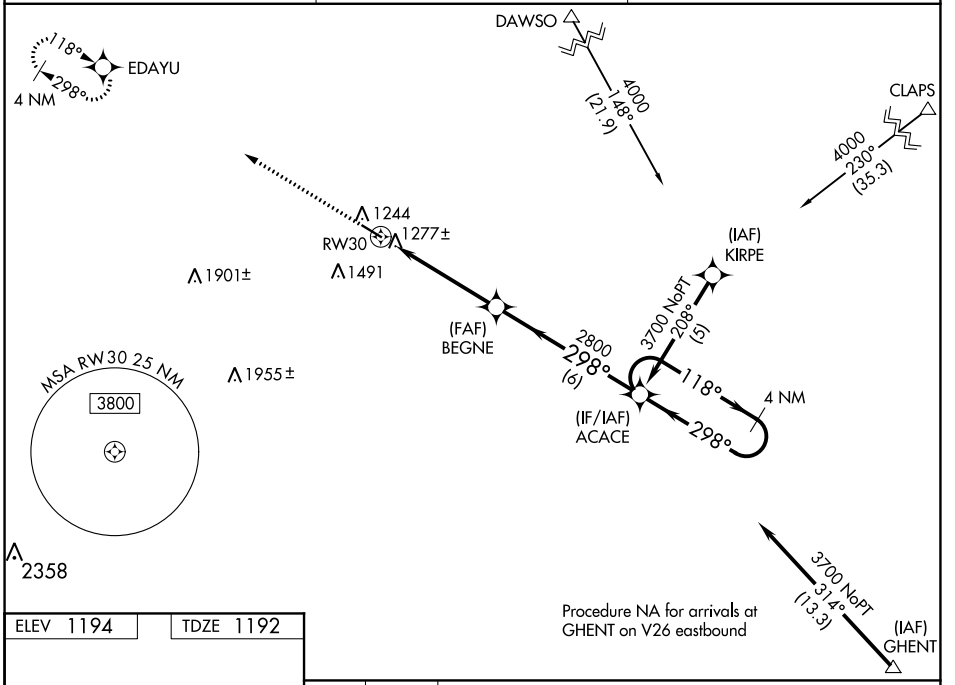

ELEV 1194 | TDZE 1192



MIRL Rwy 12-30 (L)
REIL Rwys 12 and 30 (L)

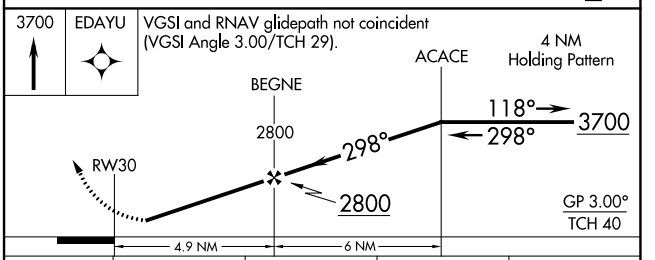

CATEGORY	A	B	C	D
LPV DA	1442-1 250 (300-1)			
LNAV/VNAV DA	1573-1½ 381 (400-1½)			
LNAV MDA	1680-1 488 (500-1)		1680-1¼ 488 (500-1¼)	1680-1½ 488 (500-1½)
CIRCLING	1700-1 506 (600-1)		1700-1½ 506 (600-1½)	1800-2 606 (700-2)

NC-1, 03 DEC 2020 to 31 DEC 2020
NC-1, 03 DEC 2020 to 31 DEC 2020