


WAAS CH <b>50133</b> <b>W11A</b>	APP CRS <b>105°</b>	Rwy Idg <b>3302</b> TDZE <b>1183</b> Apt Elev <b>1183</b>
--	------------------------	---

RNAV (GPS) RWY 11  
PAYNESVILLE MUNI (PEX)


**T** Baro-VNAV and VDP NA when using Litchfield altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Litchfield altimeter setting and increase all DA 51 feet and all MDA 60 feet; increase LPV and LNAV/VNAV all Cats visibility 1/4 mile and LNAV Cat C and Circling Cat C visibility 1/4 mile.

**MISSED APPROACH:**  
Climb to 3000 direct  
UDALE and hold.

AWOS-3PT <b>120.35</b>	MINNEAPOLIS CENTER <b>125.5 323.1</b>	CTAF <b>122.9 0</b>
---------------------------	--	------------------------

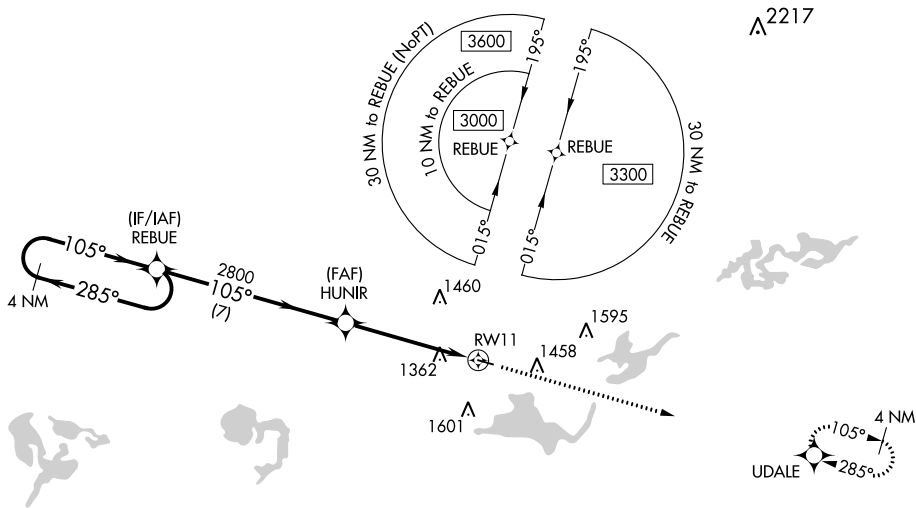

ELEV 1183		TDZE 1183
-----------	--	-----------

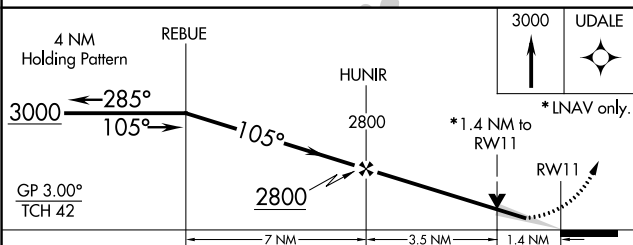

CATEGORY	A	B	C	D
LPV DA	1383-1 200 (200-1)			NA
LNAV/ VNAV DA	1653-1 $\frac{5}{8}$ 470 (500-1 $\frac{5}{8}$ )			NA
LNAV MDA	1680-1 497 (500-1)		1680-1 $\frac{3}{8}$ 497 (500-1 $\frac{3}{8}$ )	NA
CIRCLING	1680-1 497 (500-1)	1700-1 517 (600-1)	1780-1 $\frac{1}{2}$ 597 (600-1 $\frac{1}{2}$ )	NA

MIRL Rwy 11-29 **L**  
REIL Rwy 11 and 29 **L**