RNAV (GPS) RWY 17

PRATT RGNL (PTT)

WAAS	APP CRS	Rwy Idg	5500
CH 99607	173°	TDZE	1953
W17A		Apt Elev	1953

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use Great Bend altimeter setting and increase all DA/MDA 100 feet and LPV visibility ¼ mile all Cats, LNAV/VNAV visibility ½ mile all Cats and LNAV Cat C ¼ mile. Baro-VNAV and VDP NA when using Great Bend altimeter setting.

MISSED APPROACH: Climb to 4300 direct ZUSKI and hold.

AWOS-3PT	KANSAS CITY CENTER	UNICOM
118.725	118.8 322.425	122.8 (CTAF) L

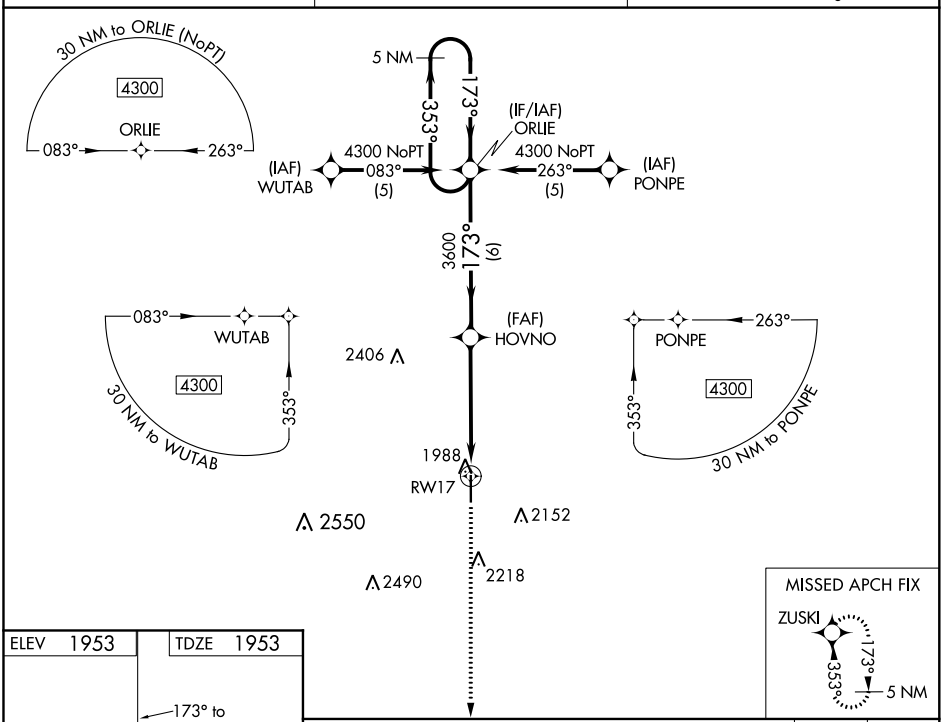

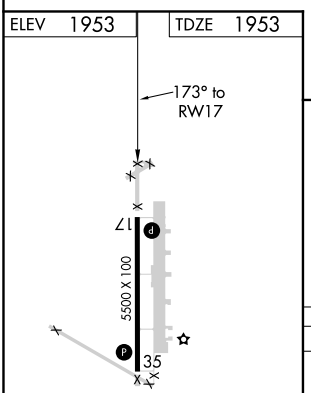

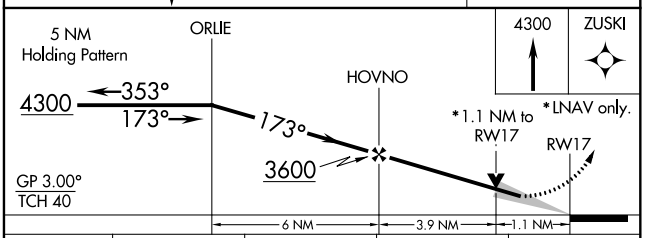

CATEGORY	A	B	C	D
LPV DA	2203-1 250 (300-1)			NA
LNAV/VNAV DA	2258-1 305 (400-1)			NA
LNAV MDA	2340-1 387 (400-1)			NA
CIRCLING	2380-1 427 (500-1)	2420-1 467 (500-1)	2420-1½ 467 (500-1½)	NA

REIL Rwys 17 and 35
MIRL Rwy 17-35 L

NC-2, 03 DEC 2020 to 31 DEC 2020
NC-2, 03 DEC 2020 to 31 DEC 2020