WAAS CH 77603 W09A	APP CRS 089°	Rwy Idg 8175 TDZE 857 Apt Elev 869

RNAV (GPS) RWY 9

THE EASTERN IOWA (CID)

Baro-VNAV NA when using Iowa City altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Iowa City altimeter setting and increase all DA 64 feet and all MDA 80 feet; increase LNAV/VNAV all Cats visibility to RVR 5000 and LNAV Cat C to RVR 4000. For inoperative MALSR increase LNAV Cat D visibility to RVR 6000. VDP NA with Iowa City altimeter setting. When using Iowa City altimeter setting; for inoperative MALSR, increase LPV all Cats visibility to RVR 5000, LNAV Cat C visibility to RVR 6000 and LNAV Cat D visibility to 1½ miles.

#RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Iowa City altimeter setting.

MALSR

MISSED APPROACH: Climb to 2700 direct JUTUS and hold.

ATIS	CEDAR RAPIDS APP CON*	CEDAR RAPIDS TOWER*	GND CON	CLNC DEL	UNICOM
124.15	119.7 266.8	118.7 (CTAF) L 266.8	121.6	125.45	122.95

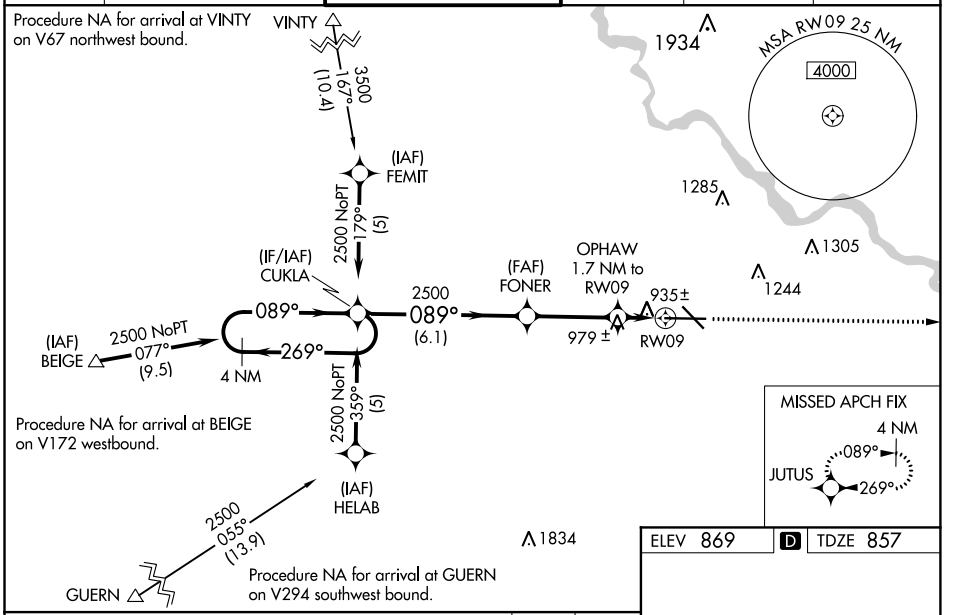

ELEV 869	D	TDZE 857

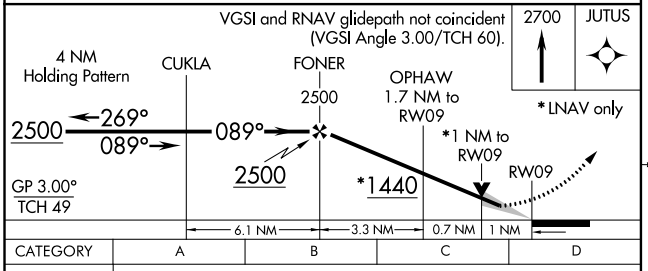

CATEGORY	A	B	C	D
LPV DA#	1057/24 200 (200-½)			
LNAV/VNAV DA	1204/40 347 (400-¾)			
LNAV MDA	1240/24 383 (400-½)			1240/50 383(400-1)
CIRCLING	1280-1 411 (500-1)	1320-1 451 (500-1)	1320-1½ 451 (500-1½)	1420-2 551 (600-2)



MIRL Rwy 13-31 L
HIRL Rwy 9-27 L
REIL Rwy 13

NC-3, 03 DEC 2020 to 31 DEC 2020
NC-3, 03 DEC 2020 to 31 DEC 2020