WAAS CH **97414** **W26A**	APP CRS **259°**	Rwy Idg **5000** TDZE **463** Apt Elev **463**

RNAV (GPS) RWY 26R

SPIRIT OF ST LOUIS (SUS)

RNP APCH.

T A Rwy 26R helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. VDP and Baro-VNAV NA when using St Louis Lambert Intl altimeter setting. When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase LPV DA to 768 feet, LNAV/VNAV DA to 834 feet, and all MDA 60 feet, increase LPV and LNAV/VNAV all Cats visibility ⅛ mile.

MISSED APPROACH: Climb to 3000 direct EXESS and hold.

ATIS	ST. LOUIS APP CON	SPIRIT TOWER*	GND CON	CLNC DEL	ST. LOUIS CLNC DEL	UNICOM
134.8	**126.5 254.3**	**124.75** (CTAF) L **257.2**	**121.7**	**133.1**	**121.7** (when tower closed)	**122.95**

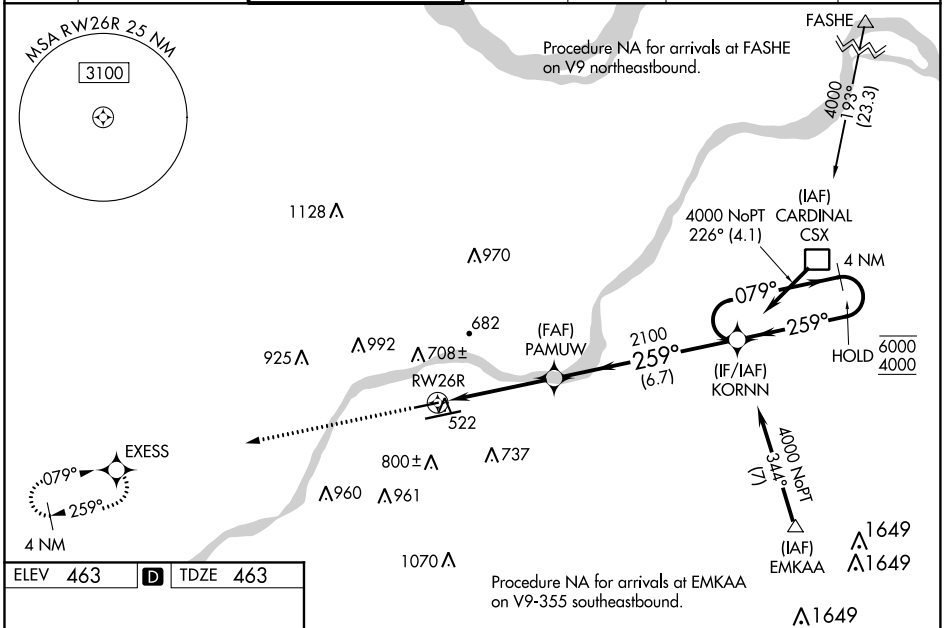

ELEV 463 D TDZE 463



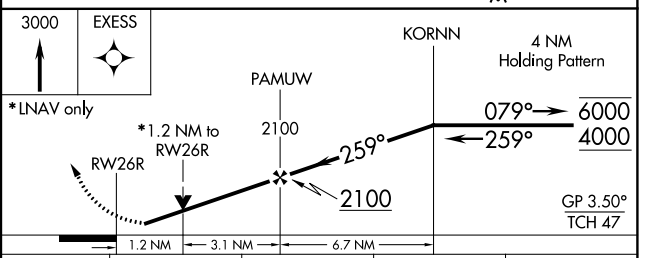

CATEGORY	A	B	C	D
LPV DA	713-¾ 250 (300-¾)		NA	
LNAV/VNAV DA	780-⅞ 317 (400-⅞)		NA	
LNAV MDA	940-1 477 (500-1)		NA	
CIRCLING	1100-1 637 (700-1)	1120-1 657 (700-1)	NA	

MIRL Rwy 8L-26R L
HIRL Rwy 8R-26L L

NC-3, 03 DEC 2020 to 31 DEC 2020
NC-3, 03 DEC 2020 to 31 DEC 2020