


WAAS CH <b>45841</b> <b>W14A</b>	APP CRS <b>136°</b>	Rwy Idg TDZE <b>1245</b> Apt Elev <b>1245</b>
--	------------------------	---

**RNAV (GPS) RWY 14**  
COUNCIL BLUFFS MUNI (CBF)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). Rwy 14 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3900 direct EVHAP and hold.

AWOS-3 <b>126.575</b>	OMAHA APP CON <b>124.5 263.0</b>	CLNC DEL <b>127.675</b>	UNICOM <b>122.8 (CTAF)</b>
--------------------------	-------------------------------------	----------------------------	-------------------------------

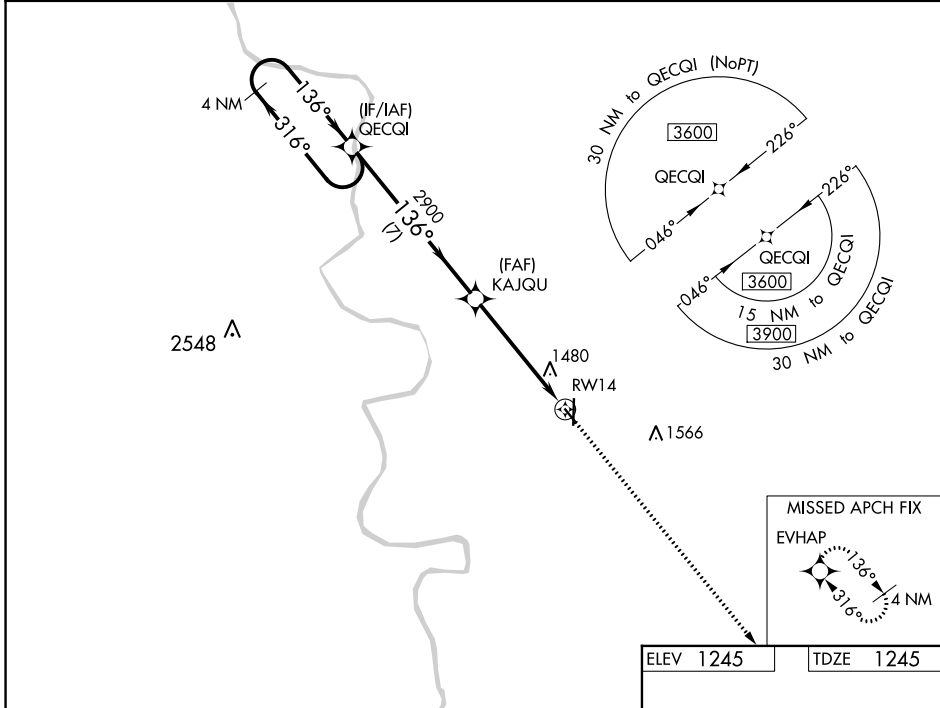

4NM Holding Pattern		VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 30).		3900	EVHAP
3600		QECQI		KAJQU	2900
GP 3.00°		TCH 40		* LNAV only	
7 NM		3.6 NM		1.5 NM	
CATEGORY	A	B	C	D	
LPV DA	1495-¾		250 (300-¾)		
LNAV/VNAV DA	1816-1½		571 (600-1½)		
LNAV MDA	1740-1	495 (500-1)	1740-1¾	495 (500-1½)	
CIRCLING	1780-1	535 (600-1)	1780-1½	1880-2	635 (700-2)

