


WAAS CH 77833 W35A	APP CRS 357°	Rwy Idg 4020 TDZE 1168 Apt Elev 1176
--	------------------------	---

RNAV (GPS) RWY 35
HAMPTON MUNI (HPT)

<p>▽ ▲ NA</p> <p>VDP and Baro-VNAV NA when using Mason City altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Mason City altimeter setting and increase all DA 67 feet and all MDA 80 feet, and LNAV/VNAV all Cats visibility ¼ mile.</p>	<p>MISSED APPROACH: Climb to 4000 direct WIBUD and hold, continue climb-in-hold to 4000.</p>
---	---

AWOS-3 121.025	MINNEAPOLIS CENTER 134.0 288.3	UNICOM 122.7 (CTAF) 1
--------------------------	--	---------------------------------

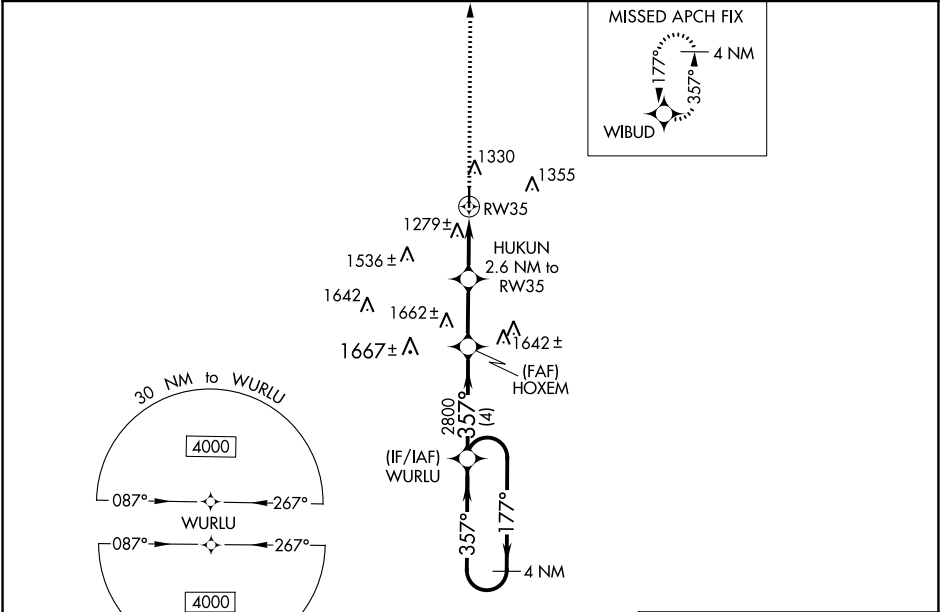

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 28).		4000 WIBUD	
4000 ← 177° → 357°		2800		*LNAV only.	
GP 3.00° TCH 40		2020		RW35	
4 NM		2.4 NM		1.3 NM	
CATEGORY	A	B	C	D	
LPV DA	1418-1	250 (300-1)	NA	NA	
LNAV/VNAV DA	1654-1½	486 (500-1½)	NA	NA	
LNAV MDA	1620-1	452 (500-1)	NA	NA	
CIRCLING	1640-1	464 (500-1)	NA	NA	

