WAAS CH 73030 W32A	APP CRS 319°	Rwy Idg 5650 / TDZE 193 / Apt Elev 200

RNAV (GPS) RWY 32

BOIRE FIELD (ASH)

Baro-VNAV and VDP NA with Manchester altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). When local altimeter setting not received, use Manchester altimeter setting: increase LPV all Cats DA to 513 feet, LNAV/VNAV all Cats DA to 666 feet and all visibilities ⅛ mile; increase all MDA 40 feet and increase LNAV Cat C/D visibility ⅛ mile and Circling Cat D ¼ mile. DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 3800 direct MUGGY INT and hold, continue climb-in-hold to 3800.

ATIS	BOSTON APP CON	NASHUA TOWER ★	GND CON	CLNC DEL
125.1	124.9 269.075	133.2 (CTAF) L	121.8	121.8

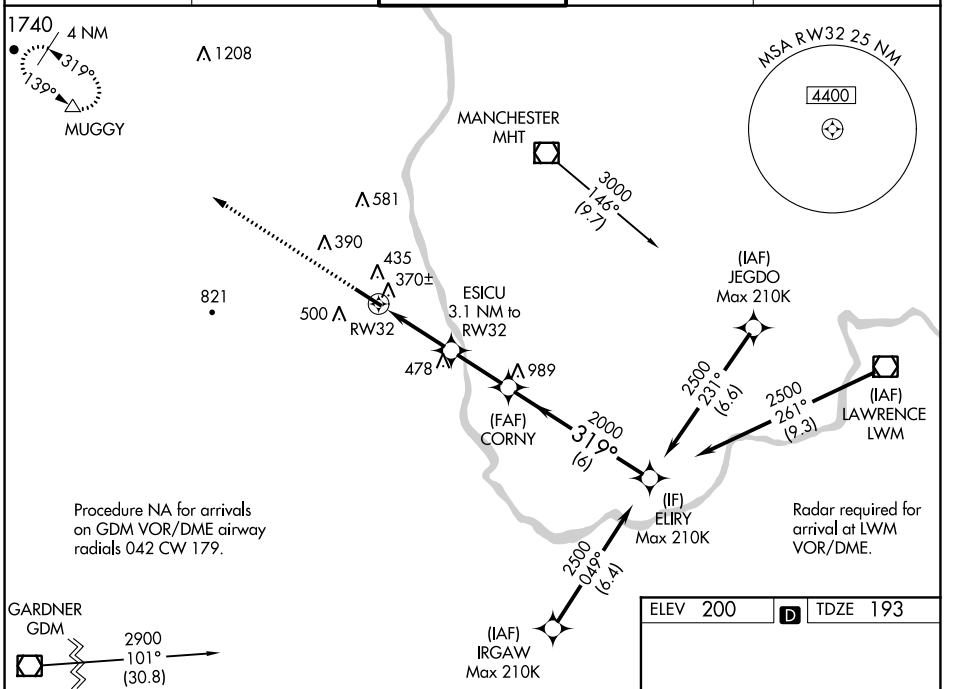

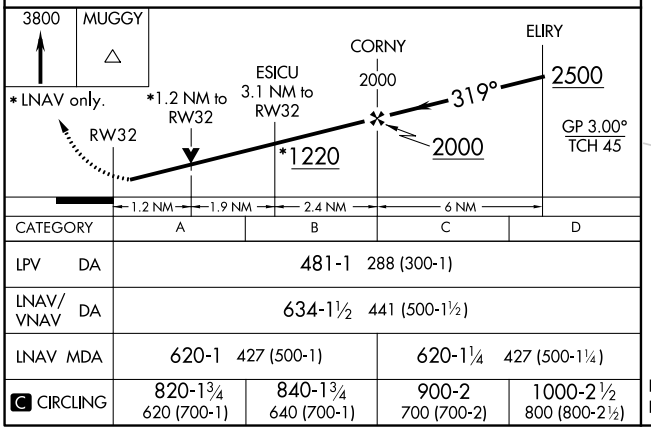

CATEGORY	A	B	C	D
LPV DA	481-1 288 (300-1)			
LNAV/VNAV DA	634-1½ 441 (500-1½)			
LNAV MDA	620-1 427 (500-1)		620-1¼ 427 (500-1¼)	
C CIRCLING	820-1¾ 620 (700-1)	840-1¾ 640 (700-1)	900-2 700 (700-2)	1000-2½ 800 (800-2½)

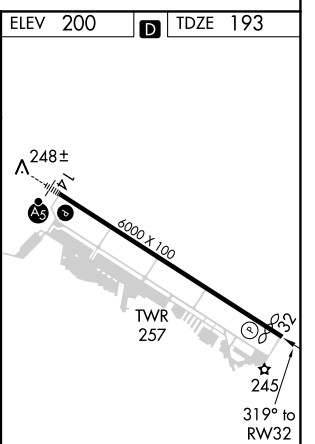

HIRL Rwy 14-32 L
REIL Rwy 32 L

NE-1, 03 DEC 2020 to 31 DEC 2020
NE-1, 03 DEC 2020 to 31 DEC 2020