


APP CRS	Rwy Idg	7569
235°	TDZE	726
	Apt Elev	727


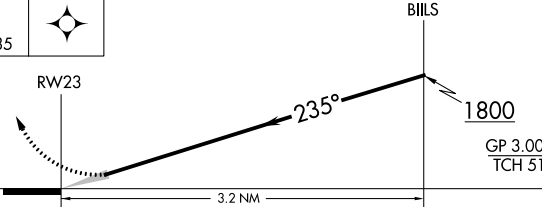
RNAV (RNP) Z RWY 23

BUFFALO NIAGARA INTL (BUF)

RNP AR APCH.	ALSIF-2	MISSED APPROACH: Climb to 3000 on the RNAV missed approach route to WABUS and hold.
▼ For uncompensated Baro-VNAV systems, procedure NA below -18°C or above 54°C. For inop ALSIF, increase RNP 0.10 all Cats visibility to 1 ¼. For inop ALSF, increase RNP 0.20 all Cats visibility to 1 ½. For inop ALSF, increase RNP 0.30 all Cats visibility to 1 ¾.		

D-ATIS	BUFFALO APP CON	BUFFALO TOWER	GND CON	CLNC DEL	CPDLC
135.35	126.15 263.125	120.5 257.8	133.2 257.8	124.7 257.8	

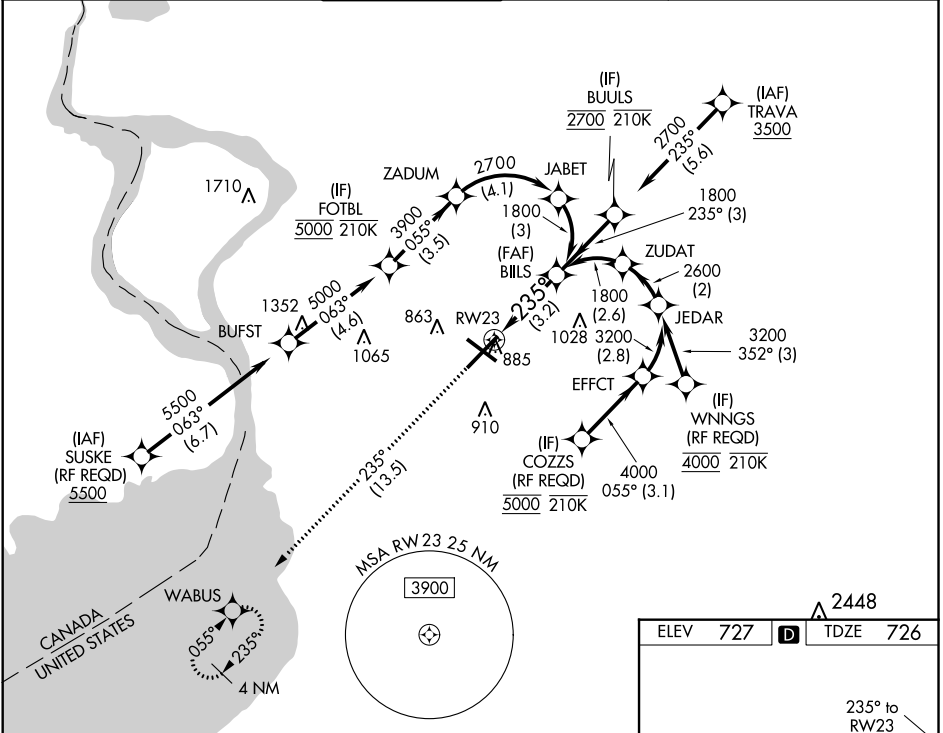

3000 ↑ tr 235	WABUS 	See planview for multiple IF locations.		
				
CATEGORY	A	B	C	D
RNP 0.10 DA	1114/45 388 (400-7%)			
RNP 0.20 DA	1170/55 444 (500-1)			
RNP 0.30 DA	1228-1¼ 502 (600-1¼)			
AUTHORIZATION REQUIRED				

