

WAAS CH 69612 W14A	APP CRS 146°	Rwy Idg TDZE 77 Apt Elev 80	6157
--	------------------------	---	-------------

RNAV (GPS) Y RWY 14


REPUBLIC (F'RG)

⚠ Inop table does not apply to LPV. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALSR: increase LNAV/VNAV all Cats visibility to 1; LNAV Cats A/B visibility to 1; LNAV Cats C/D visibility to 1½. Baro-VNAV and VDP NA when using Islip altimeter setting. When local altimeter setting not received, use Islip altimeter setting: increase LPV all Cats DA to 314; increase LNAV/ VNAV all Cats DA to 426; increase all MDA 40 feet and Circling Cats C/D visibility ¼ mile; inop table does not apply to LPV; for inop MALSR increase LNAV/VNAV all Cats visibility to 1½ and LNAV Cats A/B visibility to 1.

MALSF

MISSED APPROACH:
Climb to 1800 then climbing left turn to 3000 direct DPK VOR/DME and hold, continue climb-in-hold to 3000.

ATIS 126.65	NEW YORK APP CON 128.125 269.0	REPUBLIC TOWER ★ 118.8 (CTAF) 0 279.65	GND CON 121.6 269.6	CLNC DEL 128.25	UNICOM 122.95
-----------------------	--	--	-------------------------------	---------------------------	-------------------------

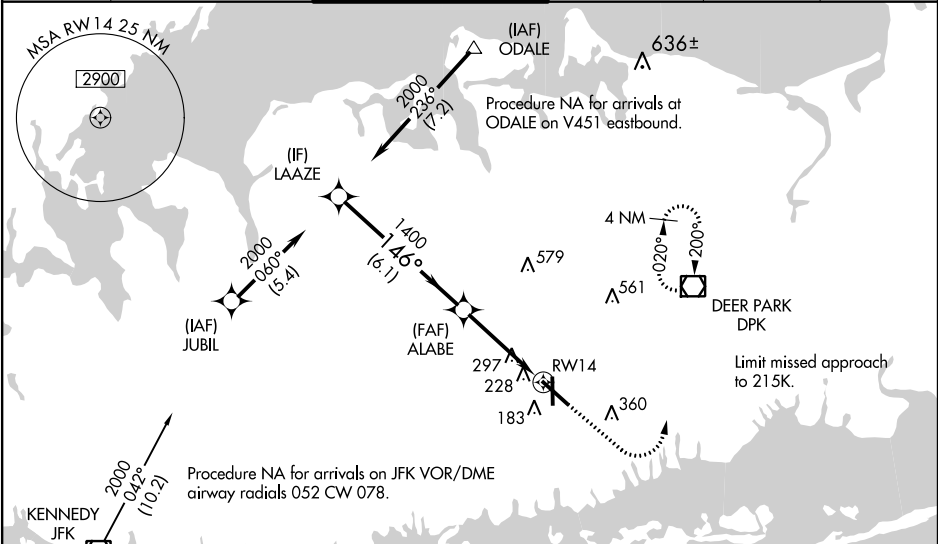

ELEV 80 TDZE 77

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 50).

LAAZE

2000

146°

1400

ALABE

1400

*LNAV only.

* 1.4 NM to RW14

RW14

GP 3.00° TCH 60

6.1 NM

2.6 NM

1.4 NM

REIL Rwy 1, 19, and 32

MIRL Rwy 1-19

HIRL Rwy 14-32

CATEGORY	A	B	C	D
LPV DA		277-3¼	200 (200-¾)	
LNAV/VNAV DA		389-¾	312 (400-¾)	
LNAV MDA	560-¾	483 (500-¾)	560-1	483 (500-1)
CIRCLING	560-1 480 (500-1)	600-1 520 (600-1)	720-1¾ 640 (700-1¾)	720-2 640 (700-2)