

WAAS CH 93733 W06A	APP CRS 063°	Rwy Idg 5950 TDZE 81 Apt Elev 81
--	------------------------	---

RNAV (GPS) RWY 6

OCEAN COUNTY (MJX)

▼

▲ NA

Circling Rwy 14, 32 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP -0.3 NA. Inop table does not apply to LPV. For inop MALSR, increase LNAV/VNAV all Cats and LNAV Cats A/B visibility to 1. When local altimeter setting not received, use Mc Guire Fld (Joint Base Mc Guire Dix Lakehurst) altimeter setting and increase all DA 41 feet and all MDA 60 feet; increase LNAV Cats C/D visibility ½ mile and Circling Cat D visibility ¼ mile. For inop MALSR when using Mc Guire Fld (Joint Base Mc Guire Dix Lakehurst) altimeter setting, increase LPV all Cats visibility to ½, LNAV/VNAV all Cats visibility to 1½, LNAV Cats A/B visibility to 1, and LNAV Cats C/D visibility to 1½. Helicopter visibility reduction below ¾ SM NA. VDP and Baro-VNAV NA when using Mc Guire Fld (Joint Base Mc Guire Dix Lakehurst) altimeter setting.


MALSR

A5

MISSED APPROACH:
Climb to 600 then climbing right turn to 2000 direct SOITE and hold.

AWOS-3PT 119.875	MC GUIRE APP CON 126.475 363.8	GCO 121.725	UNICOM 122.7 (CTAF)
----------------------------	--	-----------------------	-------------------------------

RADAR REQUIRED

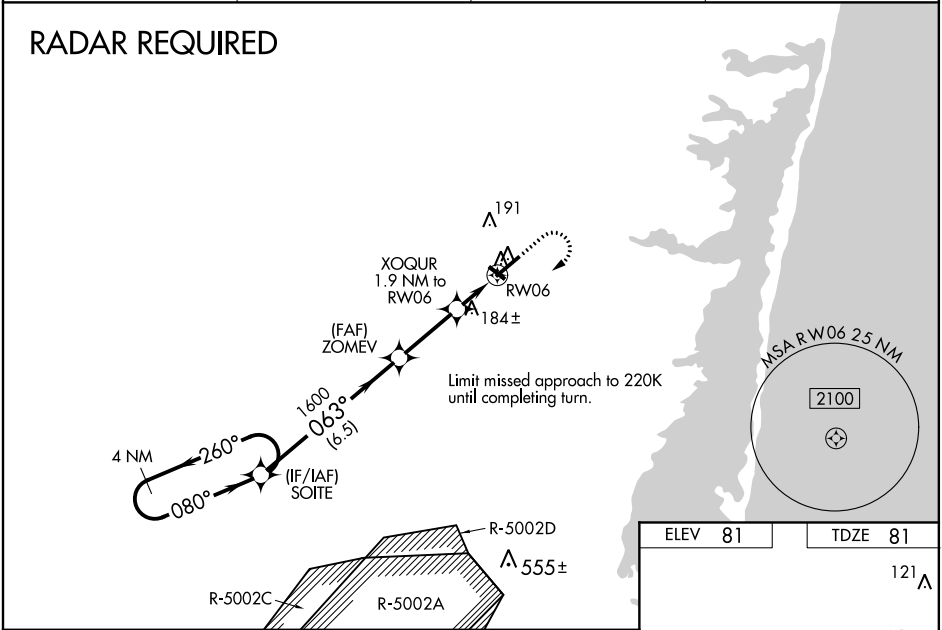

4 NM Holding Pattern

SOITE

ZONEV

XOQUR 1.9 NM to RW06

600

2000

SOITE

GP 3.00° TCH 56

2000

260°

080°

063°

1600

*720

1.2 NM to RW06

RW06

6.5 NM

2.7 NM

0.7 NM

1.2 NM

*LNAV only

CATEGORY	A	B	C	D
LPV DA		331-¾	250 (300-¾)	
LNAV/VNAV DA		405-¾	324 (400-¾)	
LNAV MDA	520-¾	439 (500-¾)	520-7⁄8	439 (500-7⁄8)
CIRCLING	520-1 439 (500-1)	560-1 479 (500-1)	580-1½ 499 (500-1½)	700-2 619 (700-2)

MIRL Rwy 14-32

HIRL Rwy 6-24

REIL Rws 14, 24 and 32