

WAAS CH <b>53515</b> <b>W27A</b>	APP CRS <b>268°</b>	Rwy Idg <b>7000</b> TDZE <b>72</b> Apt Elev <b>80</b>
--	------------------------	---

RNAV (GPS) RWY 27

NEW CASTLE (ILG)

▼


Baro-VNAV NA when using Philadelphia Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV DA NA below -15°C (5°F) or above 39°C (102°F).

⚠


DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Philadelphia Intl altimeter setting: increase LPV DA to 480, LNAV/VNAV to 584, and all MDA 60 feet; increase LPV all Cats and LNAV Cats C and D visibility ½ mile and LNAV/VNAV all Cats visibility ¼ mile.

MISSED APPROACH: Climb to 2000  
direct BATRE and via track 273° to  
ELUDE and hold.

ATIS <b>123.95</b>	PHILADELPHIA APP CON <b>118.35 323.1</b>	WILMINGTON TOWER* <b>126.00 (CTAF) 352.05</b>	GND CON <b>121.7 275.8</b>	CLNC DEL <b>119.95</b>	UNICOM <b>122.95</b>
-----------------------	---	--	-------------------------------	---------------------------	-------------------------

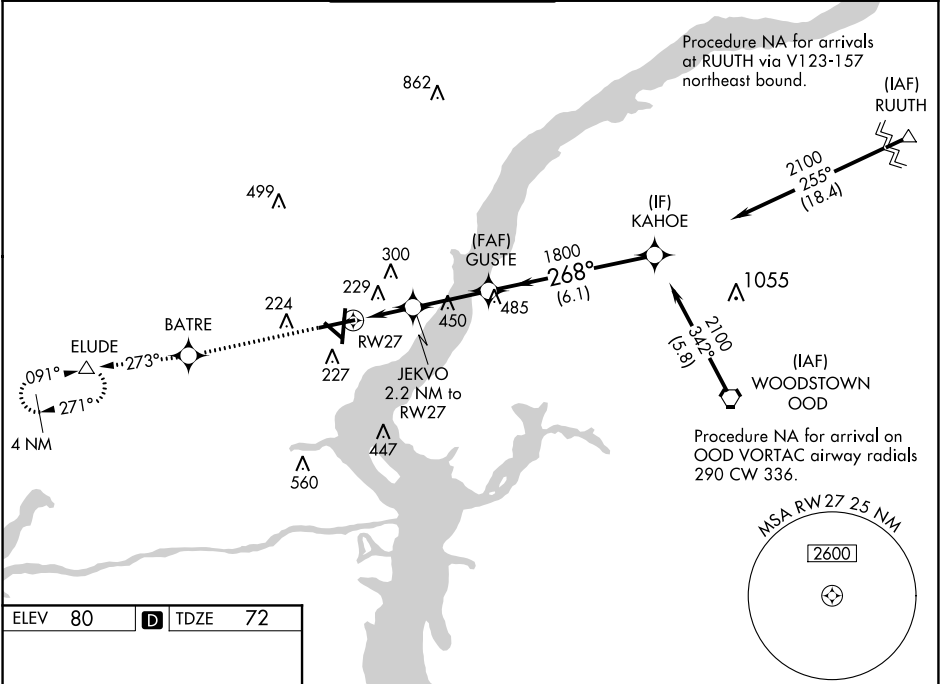

ELEV 80	<b>D</b>	TDZE 72
---------	----------	---------

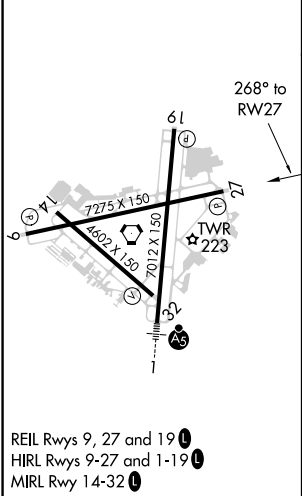

REIL Rwy 9, 27 and 19  
HIRL Rwy 9-27 and 1-19  
MIRL Rwy 14-32

2000	BATRE	tr 273°	ELUDE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 54).	Procedure Turn NA
*INAV only.					
	JEKVO 2.2 NM to RW27	GUSTE	KAHOE		
		268°	2100		
		1800			
		GP 3.10°			
		TCH 68			
	2.2 NM	2.8 NM	6.1 NM		
CATEGORY	A	B	C	D	
LPV DA		426-1 3/8	354 (400-1 1/2)		
LNAV/VNAV DA		530-1 3/8	458 (500-1 3/8)		
LNAV MDA	500-1	428 (500-1)	500-1 1/4	428 (500-1 1/4)	
CIRCLING	540-1	460 (500-1)	600-1 1/2	640-2	
			520 (600-1 1/2)	560 (600-2)	