RNAV (GPS) RWY 6

NEW RIVER VALLEY (PSK)

WAAS	APP CRS	Rwy Idg	6201
CH 87015	058°	TDZE	2105
W06A		Apt Elev	2105

RNP APCH.

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above A 44°C. When local altimeter setting not received, use Blacksburg altimeter setting and increase all DA 36 feet, and all MDA 40 feet. VDP and Baro-VNAV NA when using Blacksburg altimeter setting. Inop table does not apply to LPV all Cats and LNAV Cats A and B. For inop MALSR, increase LNAV Cat C visibility to 1¼ SM.

MALSR A5

MISSED APPROACH: Climb to 6000 direct OHICE and right turn via track 171° to FAPOM and via track 186° to WILIZ and hold.

AWOS-3	ROANOKE APP CON	ROANOKE CLNC DEL	UNICOM
127.375	126.0 339.8	121.7	122.7 (CTAF) L

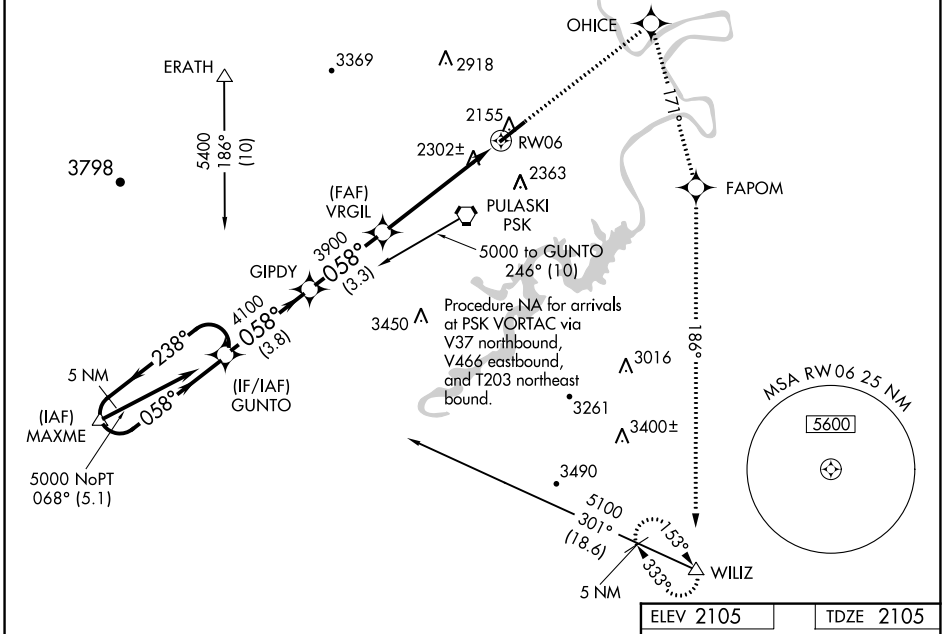

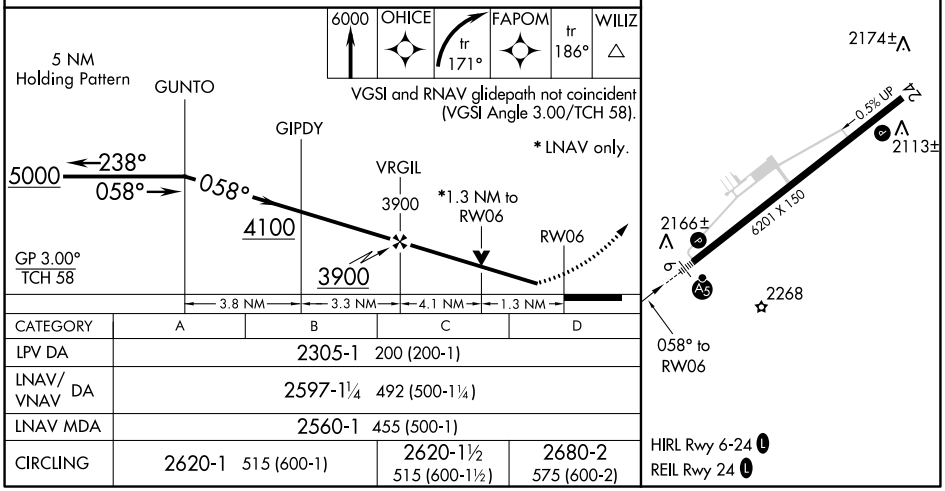

CATEGORY	A	B	C	D
LPV DA	2305-1 200 (200-1)			
LNAV/VNAV DA	2597-1¼ 492 (500-1¼)			
LNAV MDA	2560-1 455 (500-1)			
CIRCLING	2620-1 515 (600-1)		2620-1½ 515 (600-1½)	2680-2 575 (600-2)

HIRL Rwy 6-24 L
REIL Rwy 24 L

NE-3, 03 DEC 2020 to 31 DEC 2020
NE-3, 03 DEC 2020 to 31 DEC 2020