RNAV (GPS) RWY 17

SUMMIT (EVY)

WAAS CH 49002 W17A	APP CRS 175°	Rwy Idg 4488 TDZE 70 Apt Elev 70

RNP APCH.

NA Procedure NA at night. Rwy 17 helicopter visibility reduction below 1 SM NA. Baro-VNAV NA when using Wilmington altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 47°C. When local altimeter setting not received, use Wilmington altimeter setting and increase all DA 27 feet, all MDA 40 feet and LNAV Cat C visibility ⅛ SM.

MISSED APPROACH: Climb to 2000 direct WENDS and hold.

AWOS-3	PHILADELPHIA APP CON	CLNC DEL	UNICOM	
132.325	118.35 323.1	125.3	122.725 (CTAF)	123.5 L

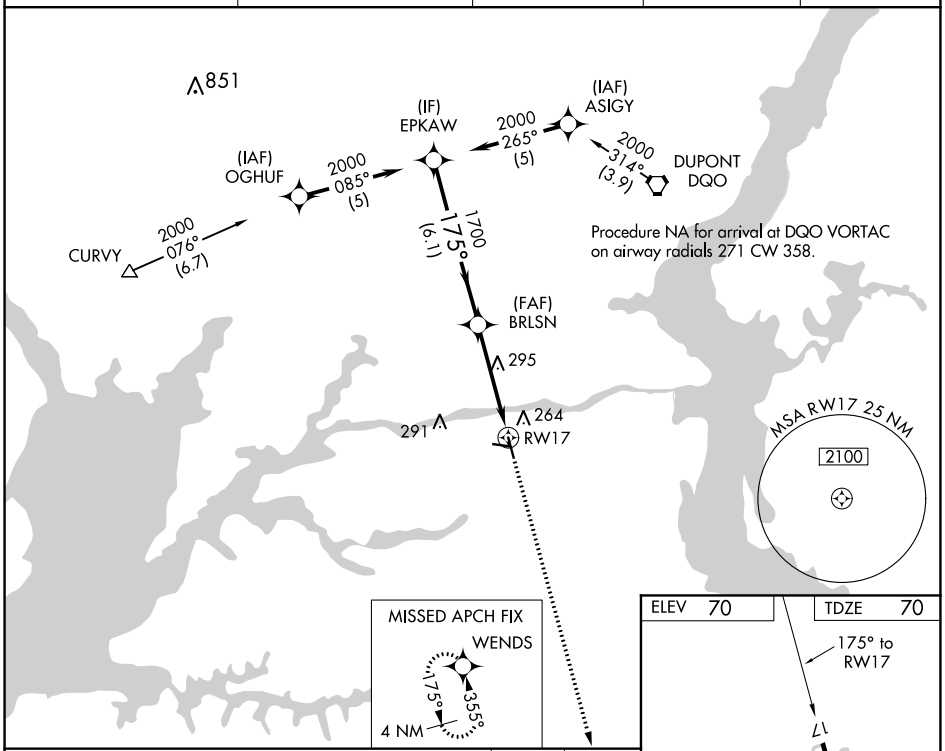

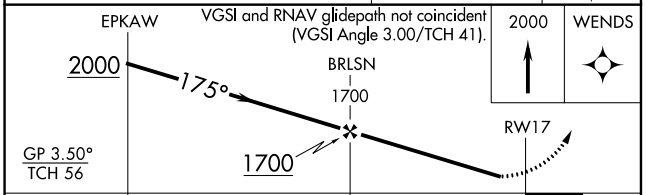

CATEGORY	A	B	C	D
LPV DA	541-1½ 471 (500-1½)			NA
LNAV/VNAV DA	619-1¾ 549 (600-1¾)			NA
LNAV MDA	560-1 490 (500-1)		560-1⅜ 490 (500-1⅜)	NA

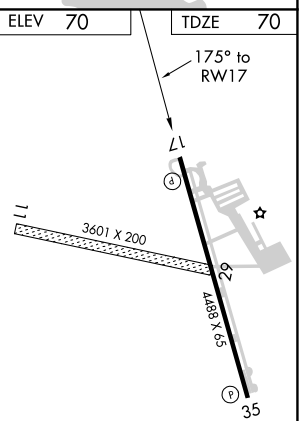

REIL Rwys 11 and 29 L
REIL Rwys 17 and 35
LIRL Rwy 11-29 L
MIRL Rwy 17-35

NE-3, 03 DEC 2020 to 31 DEC 2020
NE-3, 03 DEC 2020 to 31 DEC 2020