


AWOS-3
121.25
CLNC DEL
129.525
UNICOM
122.7 (CTAF)
POTOMAC DEP CON
125.52 291.62

TOP ALTITUDE:
ASSIGNED BY ATC

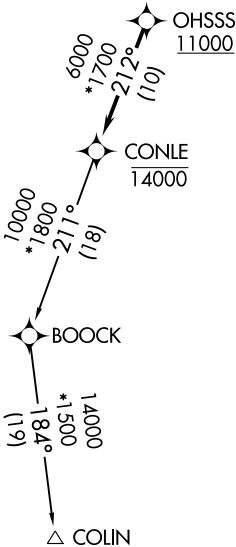

- NOTE: RNAV 1.
NOTE: DME/DME/IRU or GPS required.
NOTE: RADAR required.
NOTE: Turbojets only.

TAKEOFF MINIMUMS:
Rwy 16: 400-2¾ or Standard with minimum climb
of 225' per NM to 1300.
Rwy 34: Standard.

NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

Fly heading and maintain altitude assigned by ATC, expect RADAR vectors to cross OHSSS at or above 11000, then on track 212° to cross CONLE at or below 14000, then on COLIN transition. Expect filed altitude within 10 minutes after departure.

COLIN TRANSITION (CONLE3.COLIN)