
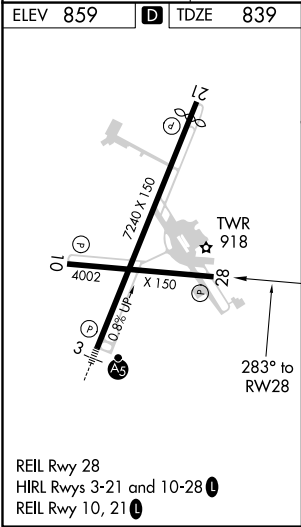


WAAS CH <b>61227</b> <b>W28A</b>	APP CRS <b>283°</b>	Rwy Idg TDZE Apt Elev	<b>4002</b> <b>839</b> <b>859</b>
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 28

MID-OHIO VALLEY RGNL (PKB)

RNP APCH.				
<div><div>▼ ▲</div><div>Rwy 28 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Athens/Albany altimeter setting and increase all MDA 100 feet, increase LP/LNAV Cts C/D visibility to 1½ SM, and Circling Cat C to 1¾ SM. Straight-in Rwy 28 NA at night, Circling Rwy 10, 28 NA at night.</div></div>			MISSED APPROACH: Climb to 3000 direct FASAT and hold.	
ATIS 124.35	INDIANAPOLIS CENTER 125.55 398.9	PARKERSBURG TOWER ★ 123.7 (CTAF) 0 257.8	GND CON 121.7	UNICOM 122.95

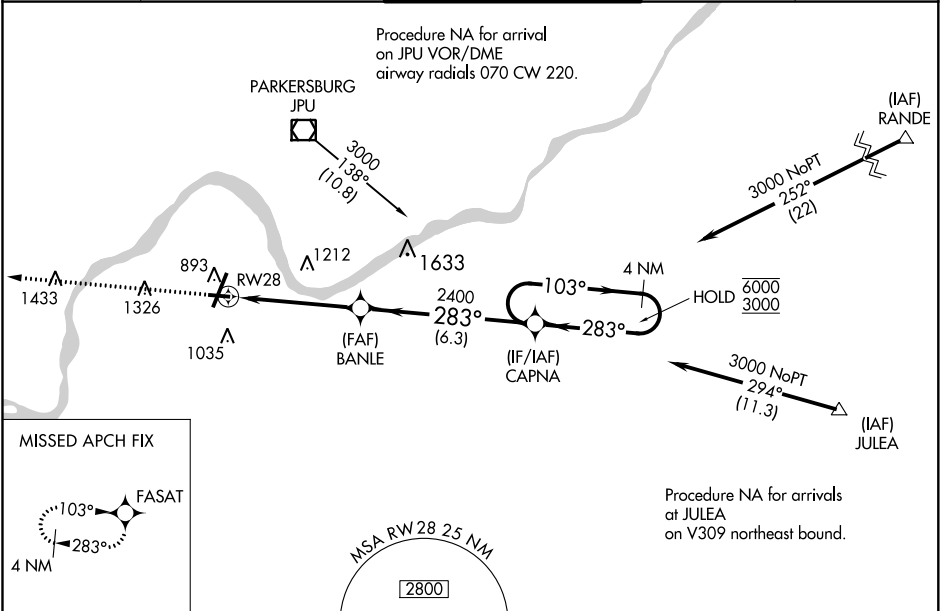

<div>3000 ↑</div> <div>FASAT </div>		Visual Segment - Obstacles.		<div>4 NM Holding Pattern</div>	
<div></div>					
CATEGORY		A	B	C	D
LP	MDA	1300-1	461 (500-1)	1300-1½	461 (500-1½)
LNAV	MDA	1320-1	481 (500-1)	1320-1½	481 (500-1½)
CIRCLING		1320-1 461 (500-1)	1340-1 481 (500-1)	1360-1½ 501 (600-1½)	1420-2 561 (600-2)