




WAAS CH <b>70602</b> <b>W03A</b>	APP CRS <b>032°</b>	Rwy Idg <b>10502</b> TDZE <b>3680</b> Apt Elev <b>3680</b>
----------------------------------------	------------------------	------------------------------------------------------------------


RNAV (GPS) Y RWY 3  
GREAT FALLS INTL (GTF)

 -33°C	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 50°C (123°F). DME/DME RNP-0.3 NA. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.	ALSF-2 	MISSED APPROACH: Climb to 6200 direct DEELM and on track 032° to PSHKN and hold.
------------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------	----------------------------------------------------------------------------------

ATIS <b>126.6 269.0</b>	GREAT FALLS APP CON <b>128.6 379.175</b>	GREAT FALLS TOWER <b>118.7 282.2</b>	GND CON <b>121.7 348.6</b>	CLNC DEL <b>121.7 348.6</b>
----------------------------	---------------------------------------------	-----------------------------------------	-------------------------------	--------------------------------

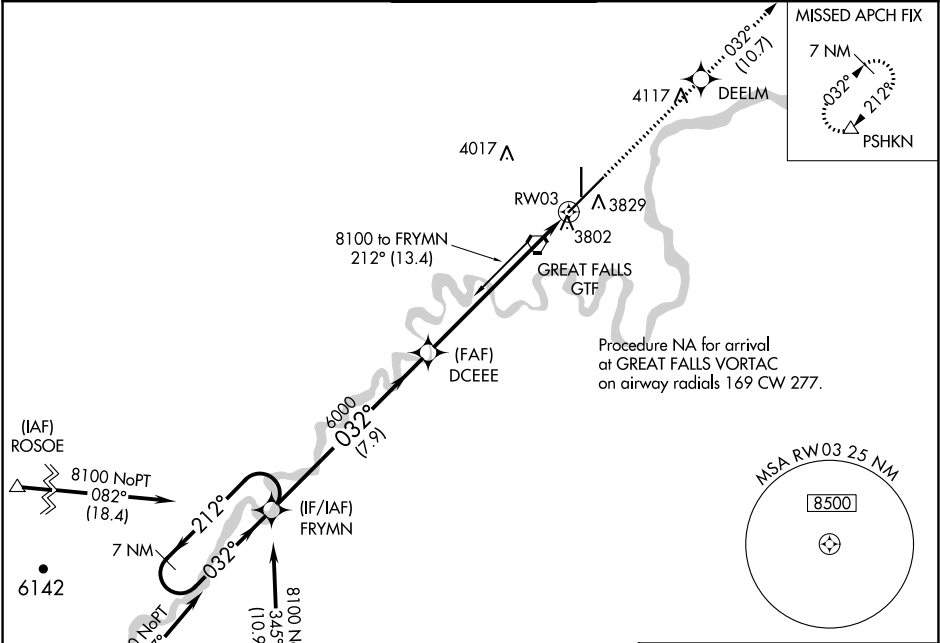

ELEV 3680	TDZE 3680
-----------	-----------

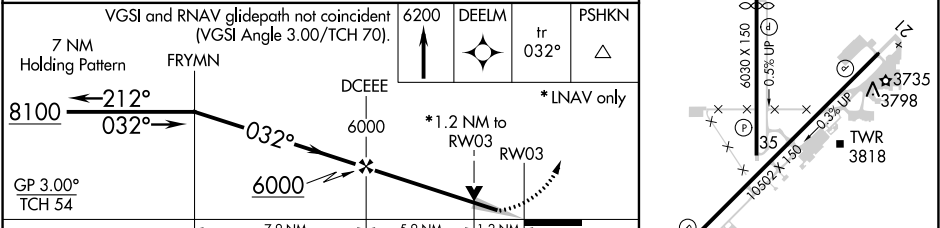

CATEGORY	A	B	C	D
LPV DA	3880/18		200 (200-½)	
LNAV/VNAV DA	3963/24		283 (300-½)	
LNAV MDA	4140/24 460 (500-½)		4140/45 460 (500-¾)	
CIRCLING	4140-1 460 (500-1)		4320-1¾ 640 (700-1¾) 4420-2¼ 740 (800-2¼)	