


| | | |
|---------|----------|------|
| APP CRS | Rwy Idg | 8600 |
| 258° | TDZE | 270 |
| | Apt Elev | 270 |

RNAV (GPS) RWY 26


TINIAN INTL (TNI)(PGWT)

| | |
|--|--|
| RNP APCH. | MISSED APPROACH: Climbing right turn to 2800 direct SN NDB and hold, continue climb-in-hold to 2800. |
| Obtain local altimeter setting on CTAF; when not received, use Saipan altimeter setting. VDP NA when using Saipan altimeter setting. | |

| | |
|--------------|----------------|
| GUAM APP CON | SAIPAN RADIO |
| 118.4 290.5 | 123.6 (CTAF) 0 |

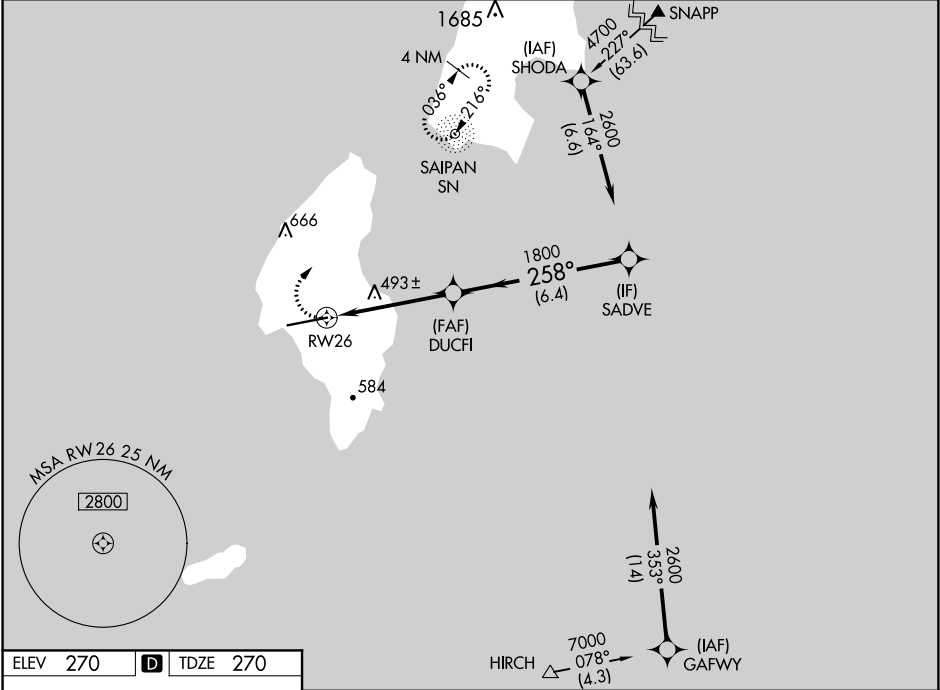

| | | |
|----------|---|----------|
| ELEV 270 | D | TDZE 270 |
|----------|---|----------|

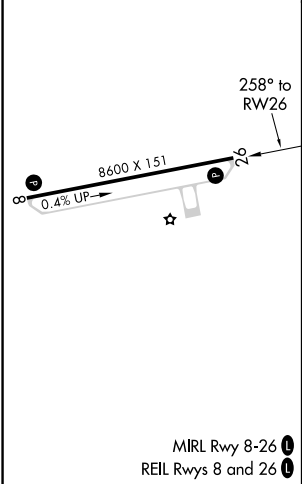

2800

SN

1.4 NM to RW26

RW26

1.4

3.2 NM

6.4 NM

DUCFI

1800

SADVE

2600

258°

3.04°

TCH 45

Procedure Turn NA

| CATEGORY | A | B | C | D |
|-----------------------------------|----------------------|----------------------|-------------------------|-------------------------|
| LNAV MDA | 760-1 | 490 (500-1) | 760-1¼ 490 (500-1¼) | 760-1½ 490 (500-1½) |
| CIRCLING | 760-1 490 (500-1) | 860-1 590 (600-1) | 1000-2 730 (800-2) | 1060-2½ 790 (800-2½) |
| SAIPAN ALTIMETER SETTING MINIMUMS | | | | |
| LNAV MDA | 780-1 | 510 (600-1) | 780-1½ | 510 (600-1½) |
| CIRCLING | 800-1 530 (600-1) | 900-1 630 (700-1) | 1040-2¼ 770 (800-2¼) | 1100-2¾ 830 (900-2¾) |