RNAV (GPS) RWY 35
ENID WOODRING RGNL (WDG)

WAAS CH 97413 W35A	APP CRS 355°	Rwy ldg 8614 TDZE 1147 Apt Elev 1167

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Circling Rwy 13 NA at night. DME/DME RNP-0.3 NA. For inop ALS, increase LPV Cat E visibility to ¾ SM, increase LNAV/VNAV all Cats visibility to ¾ SM, increase LNAV Cat E visibility to 1¼ SM.

MALSR

MISSED APPROACH: Climb to 3000 direct NIDME and hold.

AWOS-3	VANCE APP CON ★	WOODRING TOWER ★	GND CON
120.625	121.3 346.325	118.9 (CTAF) L 257.95	121.925

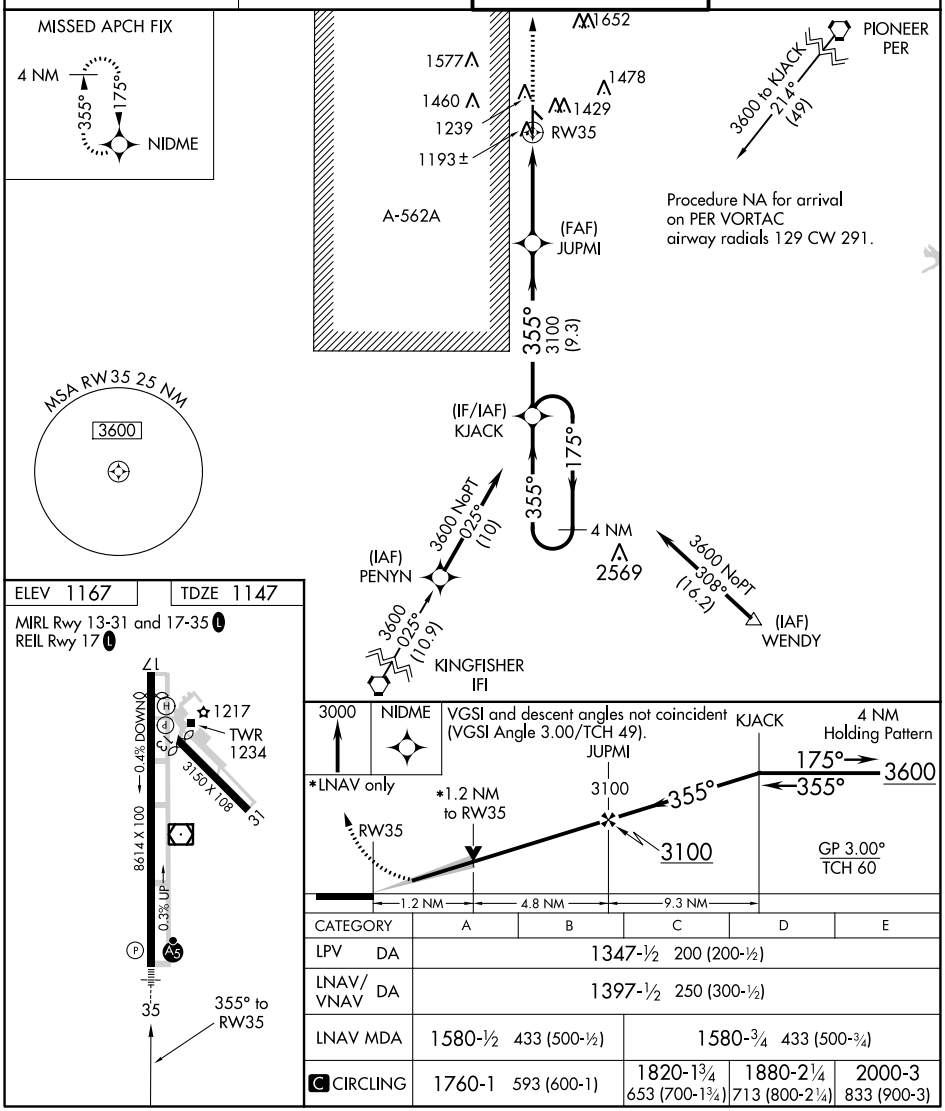

CATEGORY	A	B	C	D	E
LPV DA	1347-½ 200 (200-½)				
LNAV/VNAV DA	1397-½ 250 (300-½)				
LNAV MDA	1580-½ 433 (500-½)		1580-¾ 433 (500-¾)		
C CIRCLING	1760-1 593 (600-1)		1820-1¾ 653 (700-1¾)	1880-2¼ 713 (800-2¼)	2000-3 833 (900-3)

SC-1, 03 DEC 2020 to 31 DEC 2020

SC-1, 03 DEC 2020 to 31 DEC 2020