

WAAS CH 82125 W22A	APP CRS 224°	Rwy Idg TDZE Apt Elev	6001 274 279
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 22

WALNUT RIDGE RGNL (ARG)



▼

▲

Baro-VNAV NA when using Jonesboro altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. VDP NA with Jonesboro altimeter setting. When local altimeter setting not received, use Jonesboro altimeter setting and increase all DA 54 feet and all MDA 60 feet; increase LPV all Cats visibility ¼ mile, LNAV/VNAV all Cats visibility ¼ mile and LNAV Cat C and D visibility ⅓ mile.

MISSED APPROACH:
Climb to 2700 direct XIHAM and hold.

AWOS-3PT 135.925	MEMPHIS CENTER 120.075 289.4	UNICOM 122.8 (CTAF) 0
----------------------------	--	---------------------------------

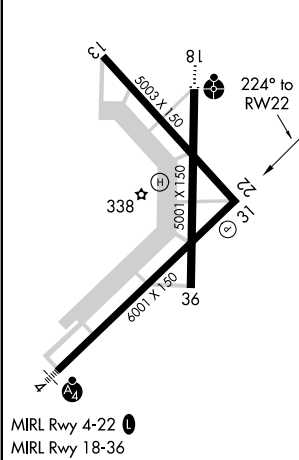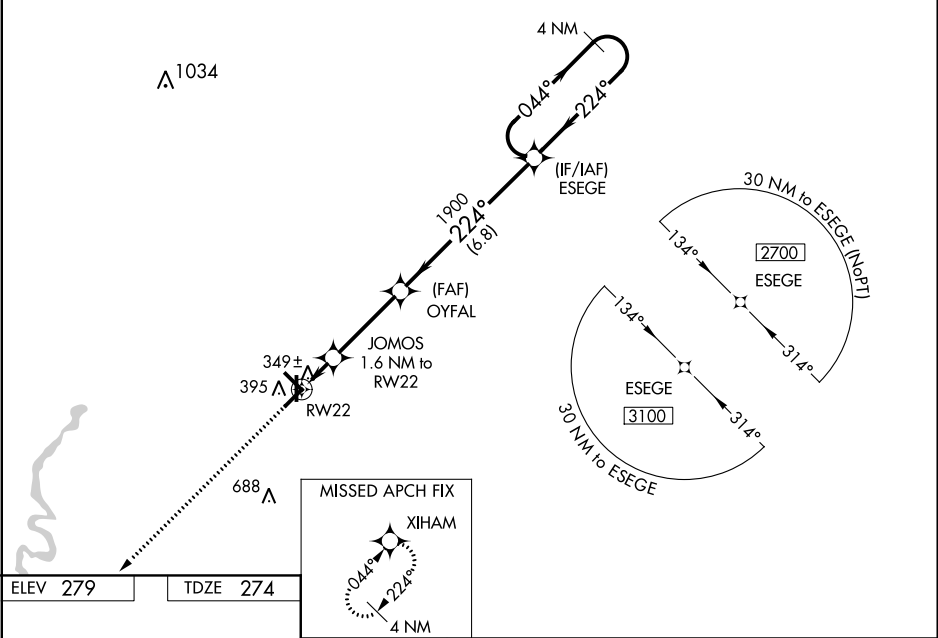

MISSED APCH FIX XIHAM 4 NM 2700 *LNAV only.				
JOMOS 1.6 NM to RWY 22 OYFAL 1900 ESEGE 4 NM Holding Pattern 224° to RWY 22 224° to 2700 GP 3.00° TCH 45				
CATEGORY	A	B	C	D
LPV DA	524-1 250 (300-1)			
LNAV/VNAV DA	524-1 250 (300-1)			
LNAV MDA	600-1 326 (400-1)			
CIRCLING	760-1 481 (500-1)	760-1½ 481 (500-1½)	840-2 561 (600-2)	